

PLC AND HMI







Biometric Authentication System is designed to enhance the security and access control of PLC (Programmable Logic Controller) and SCADA (Supervisory Control and Data Acquisition) systems. By integrating biometric authentication technologies, we provide a robust and reliable solution that ensures only authorized personnel can access critical industrial control systems.

The product is tested with all PLC'S and supports multiple interface options.

### **FEATURES**

- Biometric authentication methods such as fingerprint scanning, facial recognition, or iris scanning.
- · Integration with existing PLC and SCADA systems for seamless implementation.
- Secure storage and encryption of biometric data.
- · User management and access control functionalities.
- · Real-time monitoring and logging of access events.
- · Multi-factor authentication options for enhanced security.
- · Centralized administration and reporting capabilities.
- · Finger print enrollment : Max 1,000 Users.
- Memory : 16GB.
- Communication : RS485 MODBUS RTU, MODBUS TCP, RS232, USB.
- Power supply : DC 24V.

#### BENEFITS

- Higher level of security and access control for critical industrial control systems
- Prevention of unauthorized access and potential threats to PLC and SCADA systems
- · Reduction in the risk of data breaches and sabotage
- · Compliance with industry regulations and standards
- · Elimination of password-related security vulnerabilities
- Centralized administration for easy user management and reporting purposes

#### **APPLICATIONS**

Our Biometric Authentication System is suitable for a range of industries that rely on PLC and SCADA systems, including:

- · Manufacturing facilities with automated production lines.
- Energy and utility organizations with power generation & distribution systems.
- · Water and wastewater treatment plants.
- Transportation and logistics companies with control and monitoring systems.
- Oil and gas refineries and petrochemical plants.
- 4M (Man, Machine, Material, Method) standard implementation.



### **TECHNICAL SPECIFICATION**

#### WIRED COMMUNICATION

Isolated RS485		
Isolation	: 2500Vrms	
Duplex type / Protocol	: Half Duplex / MODBUS RTU	
Number of receivers on bus	: 32	
Data rate	: 115 Kbps	
Connector type	: Screw connector A, B, GND	

#### Ethernet 10/100 Mbps

<ul> <li>Isolation</li> </ul>	: 1500 Vrms	
• Protocol	: MODBUS TCP	
· Connector Type	: RJ45	

#### Isolated RS232

٠	Isolation	: 2500Vrms	
	Duplex type / Protocol	: Open Data	
•	Number of receivers on bus	: 32	
	Data rate	: 115 Kbps	
•	Connector type	: DB9 Female	

#### USB

· Chipset	: FTDI	
Baud rate	: 115 Kbps	
· Connector Type	: RJ45	

#### Relay

	• No. of Relay : 1 x		
•	Power Rating	: 5 Amps 250v	

## FINGERPRINT SCANNER

<ul> <li>Fingerprint image input me: &lt;0.3 seco</li> </ul>	nd	Is
--	----	----

- · Window area: 14x18 mm.
- · Matching method: Comparison method (1: 1).
- · Search method (1: N).
- · Characteristic file: 256 bytes.
- · Template file: 512 bytes.
- · Storage capacity: 1000 pieces.
- · Security Level: Five (from low to high: 1,2,3,4,5).
- Fake rate (FAR): <0.001%.</li>
- · Refusal rate (FRR): <1.0%.
- Search me: <1.0 seconds (1: 1000 hours, mean value).</li>
- · Host interface: UART \ USB1.1.
- Working environment: Temperature: -20 °C +40 °C Relave humidity: 40% RH-85% RH (no condensaon).
- Storage environment: Temperature: -40 °C +85 °C Relave humidity: <85% H (no condensaon).</li>



## MODBUS TCP MASTER / SLAVE

*	Supported Function	: 03 Holding Register	
	Supported Data Format	: 16 Bit	

## MODBUS RTU MASTER / SLAVE

<ul> <li>Supported baud rates</li> </ul>	: From 4800 to 115200
Supported Data Format	: 16 Bit
<ul> <li>Number of data bits</li> </ul>	: 8 Bit
· Number of stop bits	: 1
Parity bits	: None, Even, Odd

#### **OPERATING ENVIRONMENT**

٠	Operation temperature	: 20 °C - + 70 °C	
•	Working humidity	: < 95% ( + 25 °C )	

## MEMORY SD CARD

•	Memory	: 16 GB	
	Data Storing Format	: CSV	

### PHYSICAL SPECIFICATION


•	Length x Height x Width (LxHxW)	: 110mm x 72.5mm x 110mm
	Weight	: 150g
	Mounting	: Wall / DIN Rail
•	Enclosure	: IP20

## SUPPLY VOLTAGE

•	Supply Input Voltage	: 12V / 24V
---	----------------------	-------------

• Permissible range, lower limit (DC) : 9V

• Permissible range, Upper limit (DC) : 36V

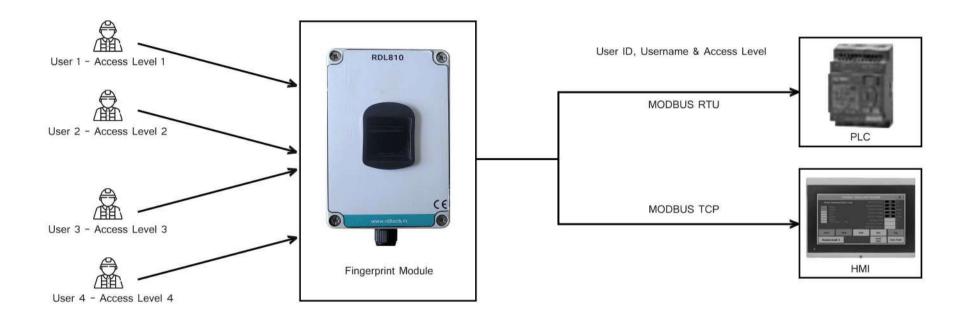

Access control levels can be registered for each user. The biometric authentication device will provide the user's ID, username and access level to the PLC or HMI via MODBUS communication when the user has successfully authenticated.



## FINGERPRINT MODULE CONFIGURATION


## Biometric Authentication Module can be configured in 2 ways

Option 1 : Configuring module using RDL Configuration Manager Software.



Plug and play configuraon Manager, that enable configuraon of all input output ports, communication interfaces and parameters.

Option 2: Configuring using your existing PLC or HMI over Modbus / RS232.

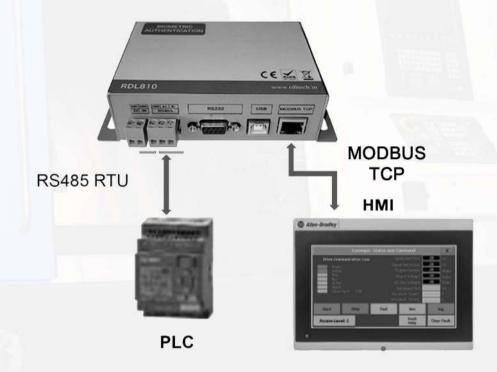

You can set up Fingerprint Enrollment and associated access control parameters through your current PLC or HMI using MODBUS RTU or TCP.



## **BIOMETRIC ACCESS CONTROL SYSTEM - RDL810**








Separate fingerprint reader with an IP65 enclosure, controller unit and connectivity cable are included.

## Packages Include:

- Fingerprint access control system 01
- Fingerprint reader with an IP65 enclosure 01
- Connectivity Cable 1 mts

#### Note:

- You can also connect your PLC over the ethernet work using MODBUS TCP.
- · Enquiry for extended connecting cable if more then 2 Mtrs required.

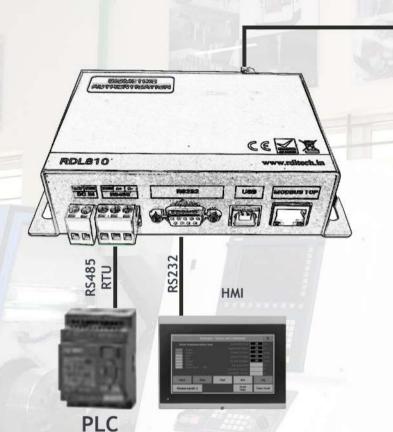

www.uditech.in

FINGERPRINT SCANNER

APPLICATION WIRING DIAGRAM



## **CUSTOM RETROFIT FINGERPRINT MODULE - RDL810A**



Separate fingerprint reader, controller unit, and connectivity cable are included

## Packages Include:

- · Fingerprint access control system 01
- · Retrofit Fingerprint Module 01
- · Connectivity Cable 2mts
- Fingerprint Mounting Adapter

### Note:

• Enquiry for extended connecting cable if more then 2 Mtrs required.



Custom Retrofit Fingerprint Module

## APPLICATION WIRING DIAGRAM - POTENTIAL CONTACT FREE INPUT TO PLC

## Switching Machine Job Operation




Privileged access to Machining Processes using different Tools and Materials.

#### Mono Stable Biometric Switch



Accountable response to situations like emergency system with valves, shutdown & access control.

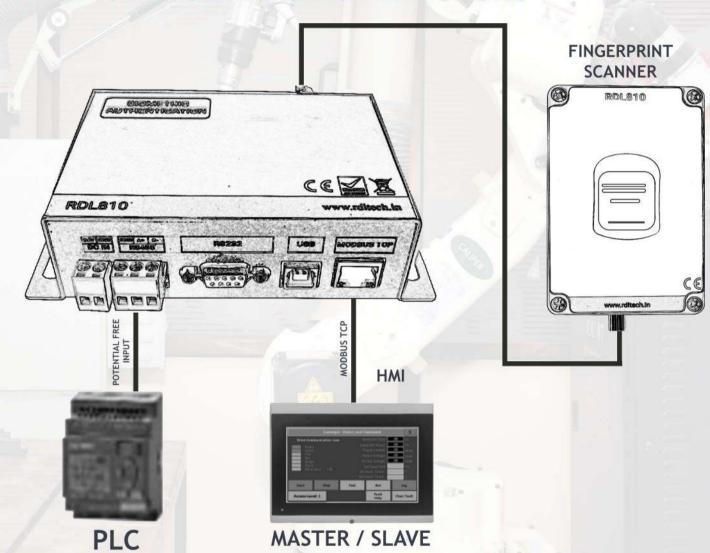




## APPLICATION WIRING DIAGRAM - REMOTE ACCESS LOG SYSTEM

#### **Production Loss Escalation**



Accountability of floor managers during machine shutdowns, timely corrective actions to preventing losses.

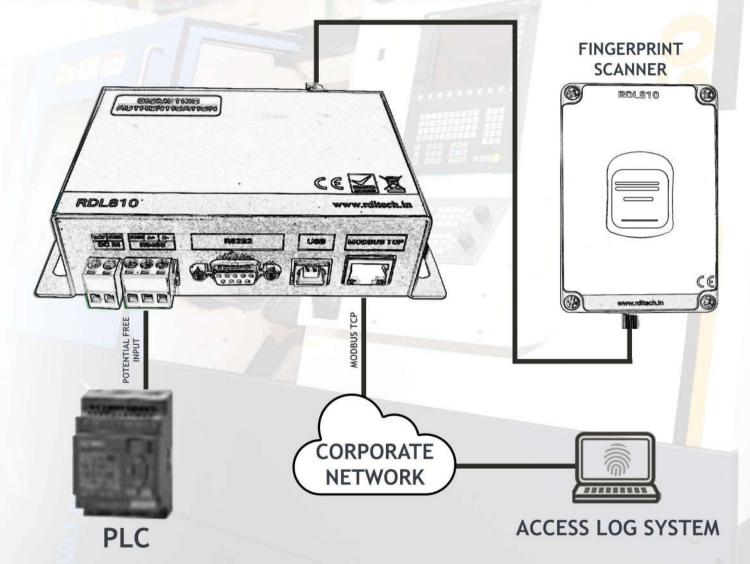



## APPLICATION WIRING DIAGRAM - OPERATOR MAPPING WITH MACHINE - 4M STANDARD (MATERIAL, METHOD, MACHINE, MAN)

#### Machine 1 Machine 2























- Track Operator Performance.
- Track Training & Performance Enhancement.
- Track Defect & Production vs Operator. Track Operator Timing.

## 4M Fishbone Diagram

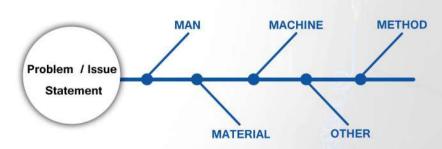

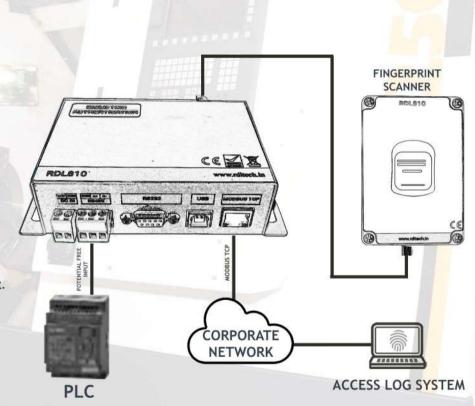




## APPLICATION WIRING DIAGRAM - ANDON - BIOMETRIC AUTHENTICATION BASED SIGNAL RESET

#### **Down Time Escalation**




Track service teams response time towards break downs, reducing down time and improved producvity.

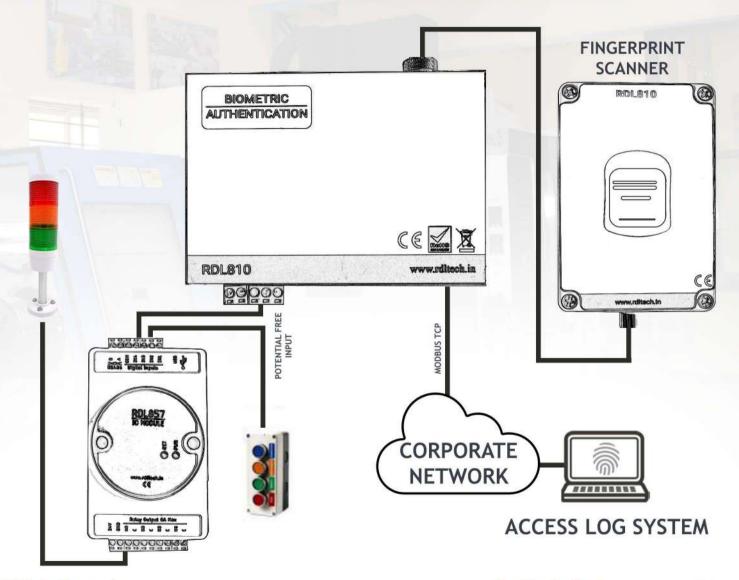



## **DIMENSIONS**

## **Biometric Controller Unit**

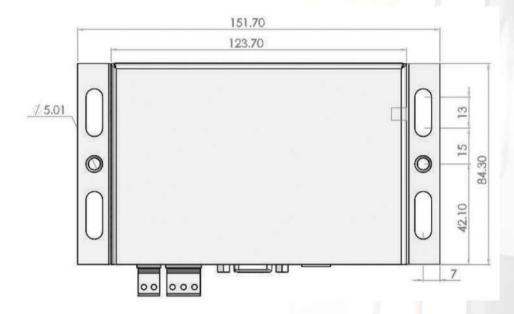

## Finger Print Scanner





# **ORDER INFORMATION**

	RDL810	RDL810A
RS485 RTU	<b>✓</b>	<b>✓</b>
MODBUS TCP	~	~
RS232	~	~
RELAY	×	×
FINGERPRINT READER WITH IP65 ENCLOUSURE	~	NA
RETROFIT FINGERPRINT SCANNER FOR CUSTOM MOUNT APPLICATION	NA	~





#### Note:

- 1. Unless otherwise specified, all parameters in this datasheet were measured at 25°C and 75% humidity.
- 2. All index testing procedures in this datasheet are based on our company's corporate standards.
- 3. We offer product customization, OEM and ODM Services; please contact the sales team @ sales@rdltech.in.
- 4. We Ship Worldwide.
- 5. Specifications are subject to change without prior notice.
- 6. For additional information on Product and to buy online @ www.researchdesignlab.com

# RDL Technologies Pvt. Ltd.

- 6 5th Floor, Sahyadri Campus, Adyar, Mangaluru 575007 | 1 +91 8088423347 | 6 +91 824 2988407
- Sales@rdltech.in | ⊕ www.rdltech.in | ⊕ www.youtube.com/@researchdesignlab956