



BIOMETRIC AUTHENTICATION SYSTEM

PLC AND HMI





Biometric Authentication System is designed to enhance the security and access control of PLC (Programmable Logic Controller) and SCADA (Supervisory Control and Data Acquisition) systems. By integrating biometric authentication technologies, we provide a robust and reliable solution that ensures only authorized personnel can access critical industrial control systems.

The product is tested with all PLC'S and supports multiple interface options.

FEATURES

- Biometric authentication methods such as fingerprint scanning, facial recognition, or iris scanning.
- Integration with existing PLC and SCADA systems for seamless implementation.
- Secure storage and encryption of biometric data.
- User management and access control functionalities.
- Real-time monitoring and logging of access events.
- Multi-factor authentication options for enhanced security.
- Centralized administration and reporting capabilities.
- Finger print enrollment : Max 1,000 Users.
- Memory : 16GB.
- Communication : RS485 MODBUS RTU, MODBUS TCP, RS232, USB.
- Power supply : DC 24V.

BENEFITS

- Higher level of security and access control for critical industrial control systems
- Prevention of unauthorized access and potential threats to PLC and SCADA systems
- Reduction in the risk of data breaches and sabotage
- Compliance with industry regulations and standards
- Elimination of password-related security vulnerabilities
- Centralized administration for easy user management and reporting purposes

APPLICATIONS

Our Biometric Authentication System is suitable for a range of industries that rely on PLC and SCADA systems, including:

- Manufacturing facilities with automated production lines.
- Energy and utility organizations with power generation & distribution systems.
- Water and wastewater treatment plants.
- Transportation and logistics companies with control and monitoring systems.
- Oil and gas refineries and petrochemical plants.
- 4M (Man, Machine, Material, Method) standard implementation.



TECHNICAL SPECIFICATION

WIRED COMMUNICATION

Isolated RS485

- Isolation : 2500Vrms
- Duplex type / Protocol : Half Duplex / MODBUS RTU
- Number of receivers on bus : 32
- Data rate : 115 Kbps
- Connector type : Screw connector A, B, GND

Ethernet 10/100 Mbps

- Isolation : 1500 Vrms
- Protocol : MODBUS TCP
- Connector Type : RJ45

Isolated RS232

- Isolation : 2500Vrms
- Duplex type / Protocol : Open Data
- Number of receivers on bus : 32
- Data rate : 115 Kbps
- Connector type : DB9 Female

USB

- Chipset : FTDI
- Baud rate : 115 Kbps
- Connector Type : RJ45

Relay

- No. of Relay : 1 x
- Power Rating : 5 Amps 250v

FINGERPRINT SCANNER

- Fingerprint image input me: <0.3 seconds.
- Window area: 14x18 mm.
- Matching method: Comparison method (1: 1).
- Search method (1: N).
- Characteristic file: 256 bytes.
- Template file: 512 bytes.
- Storage capacity: 1000 pieces.
- Security Level: Five (from low to high: 1,2,3,4,5).
- Fake rate (FAR): <0.001%.
- Refusal rate (FRR): <1.0%.
- Search me: <1.0 seconds (1: 1000 hours, mean value).
- Host interface: UART \ USB1.1.
- Communication baud rate (UART): (9600xN) bps Where N = 1 ~ 12 (default N = 6, i.e., 57600bps).
- Working environment: Temperature: -20 ℃ - +40 ℃ Relative humidity: 40% RH-85% RH (no condensaon).
- Storage environment: Temperature: -40 ℃ - +85 ℃ Relative humidity: <85% H (no condensaon).



MODBUS TCP MASTER / SLAVE

- | | |
|-------------------------|-----------------------|
| • Supported Function | : 03 Holding Register |
| • Supported Data Format | : 16 Bit |

MODBUS RTU MASTER

- | | |
|-------------------------|-----------------------|
| • Supported baud rates | : From 4800 to 115200 |
| • Supported Data Format | : 16 Bit |
| • Number of data bits | : 8 Bit |
| • Number of stop bits | : 1 |
| • Parity bits | : None, Even, Odd |

OPERATING ENVIRONMENT

- | | |
|-------------------------|---------------------|
| • Operation temperature | : 20 °C - + 70 °C |
| • Working humidity | : < 95% (+ 25 °C) |

MEMORY SD CARD

- | | |
|-----------------------|---------|
| • Memory | : 16 GB |
| • Data Storing Format | : CSV |

PHYSICAL SPECIFICATION

- | | |
|-----------------------------------|--------------------------|
| • Length x Height x Width (LxHxW) | : 110mm x 72.5mm x 110mm |
| • Weight | : 150g |
| • Mounting | : Wall / DIN Rail |
| • Enclosure | : IP20 |

SUPPLY VOLTAGE

- | | |
|---------------------------------------|-------------|
| • Supply Input Voltage | : 12V / 24V |
| • Permissible range, lower limit (DC) | : 9V |
| • Permissible range, Upper limit (DC) | : 36V |





FINGERPRINT MODULE CONFIGURATION

Biometric Authentication Module can be configured in 2 ways

Option 1 : Configuring module using RDL Configuration Manager Software.

Option 2 : Configuring using your existing PLC or HMI over Modbus / RS232.



PC

Plug and play configuraon Manager, that enable configuraon of all input output ports, communication interfaces and parameters.



RS485 RTU

MODBUS
TCP
HMI




PLC



You can set up Fingerprint Enrollment and associated access control parameters through your current PLC or HMI using MODBUS RTU or TCP.



BIOMETRIC ACCESS CONTROL SYSTEM - RDL810

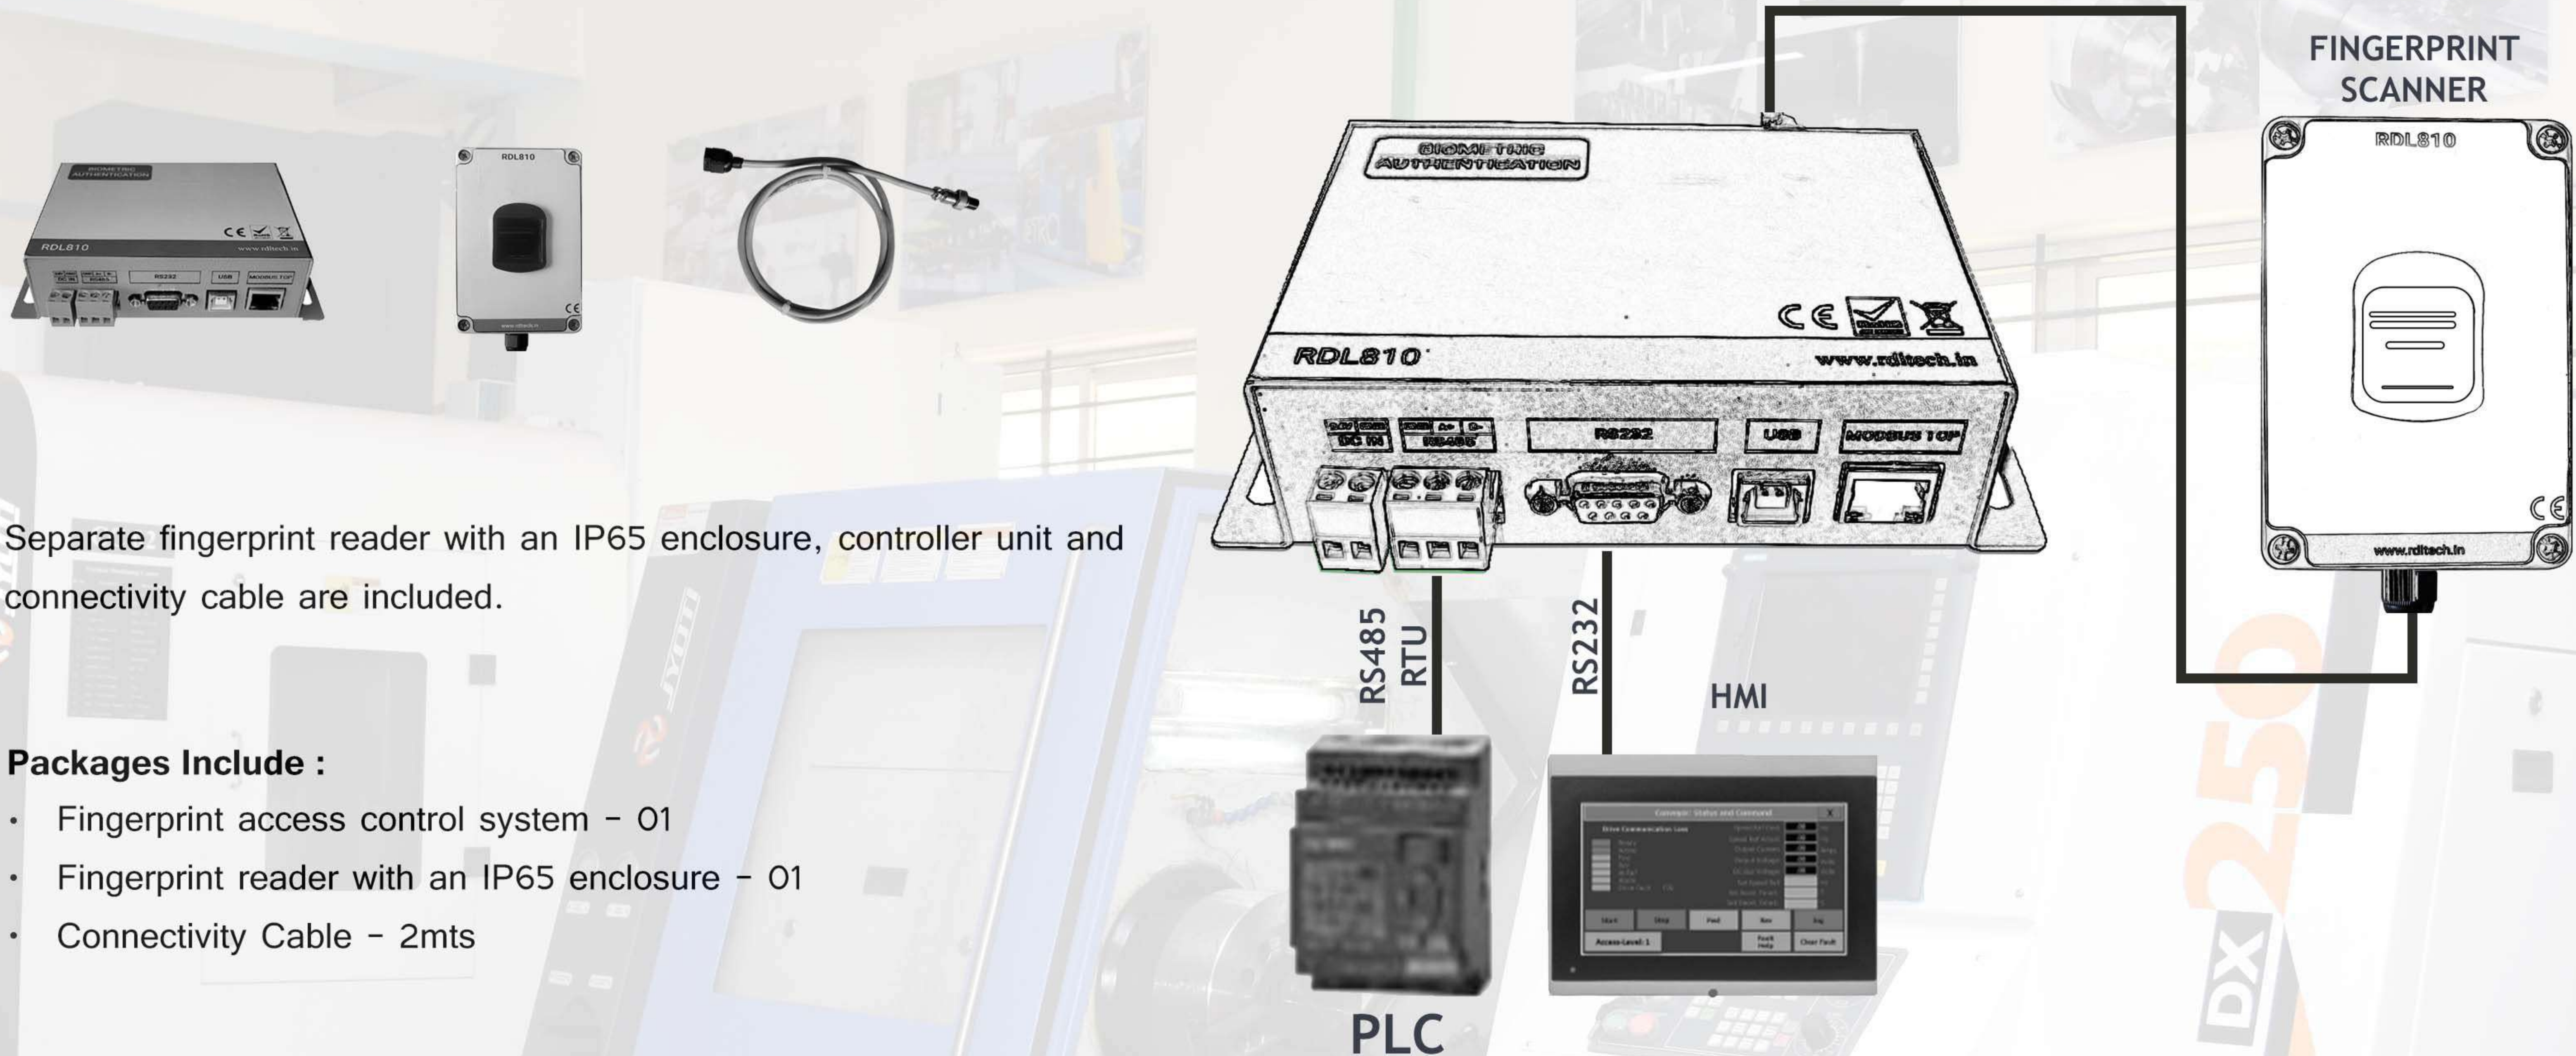

Separate fingerprint reader with an IP65 enclosure, controller unit and connectivity cable are included.

Packages Include :

- Fingerprint access control system - 01
- Fingerprint reader with an IP65 enclosure - 01
- Connectivity Cable - 2mts

APPLICATION WIRING DIAGRAM



CUSTOM RETROFIT FINGERPRINT MODULE - RDL810A



Separate fingerprint reader, controller unit, and connectivity cable are included

Packages Include :

- Fingerprint access control system - 01
- Retrofit Fingerprint Module - 01
- Connectivity Cable - 2mts
- Fingerprint Mounting Adapter



Custom Retrofit Fingerprint Module



APPLICATION WIRING DIAGRAM - POTENTIAL CONTACT FREE INPUT TO PLC

Switching Machine Job Operation




Privileged access to Machining Processes using different Tools and Materials.

Fume Extractor		
Sl. No.	Particulars	Description
1.	Make	Powertech
2.	Year	2017
3.	Electrostatic Filter	FK2000VEM (model)
4.	Centrifugal Blower	1.5 HP
5.	Filter	Wiremesh type
6.	Silencer	Upco 774B
7.	Total Reach	2 mtr
8.	Swivel	360°

Mono Stable Biometric Switch




Accountable response to situations like emergency system with valves, shutdown & access control.

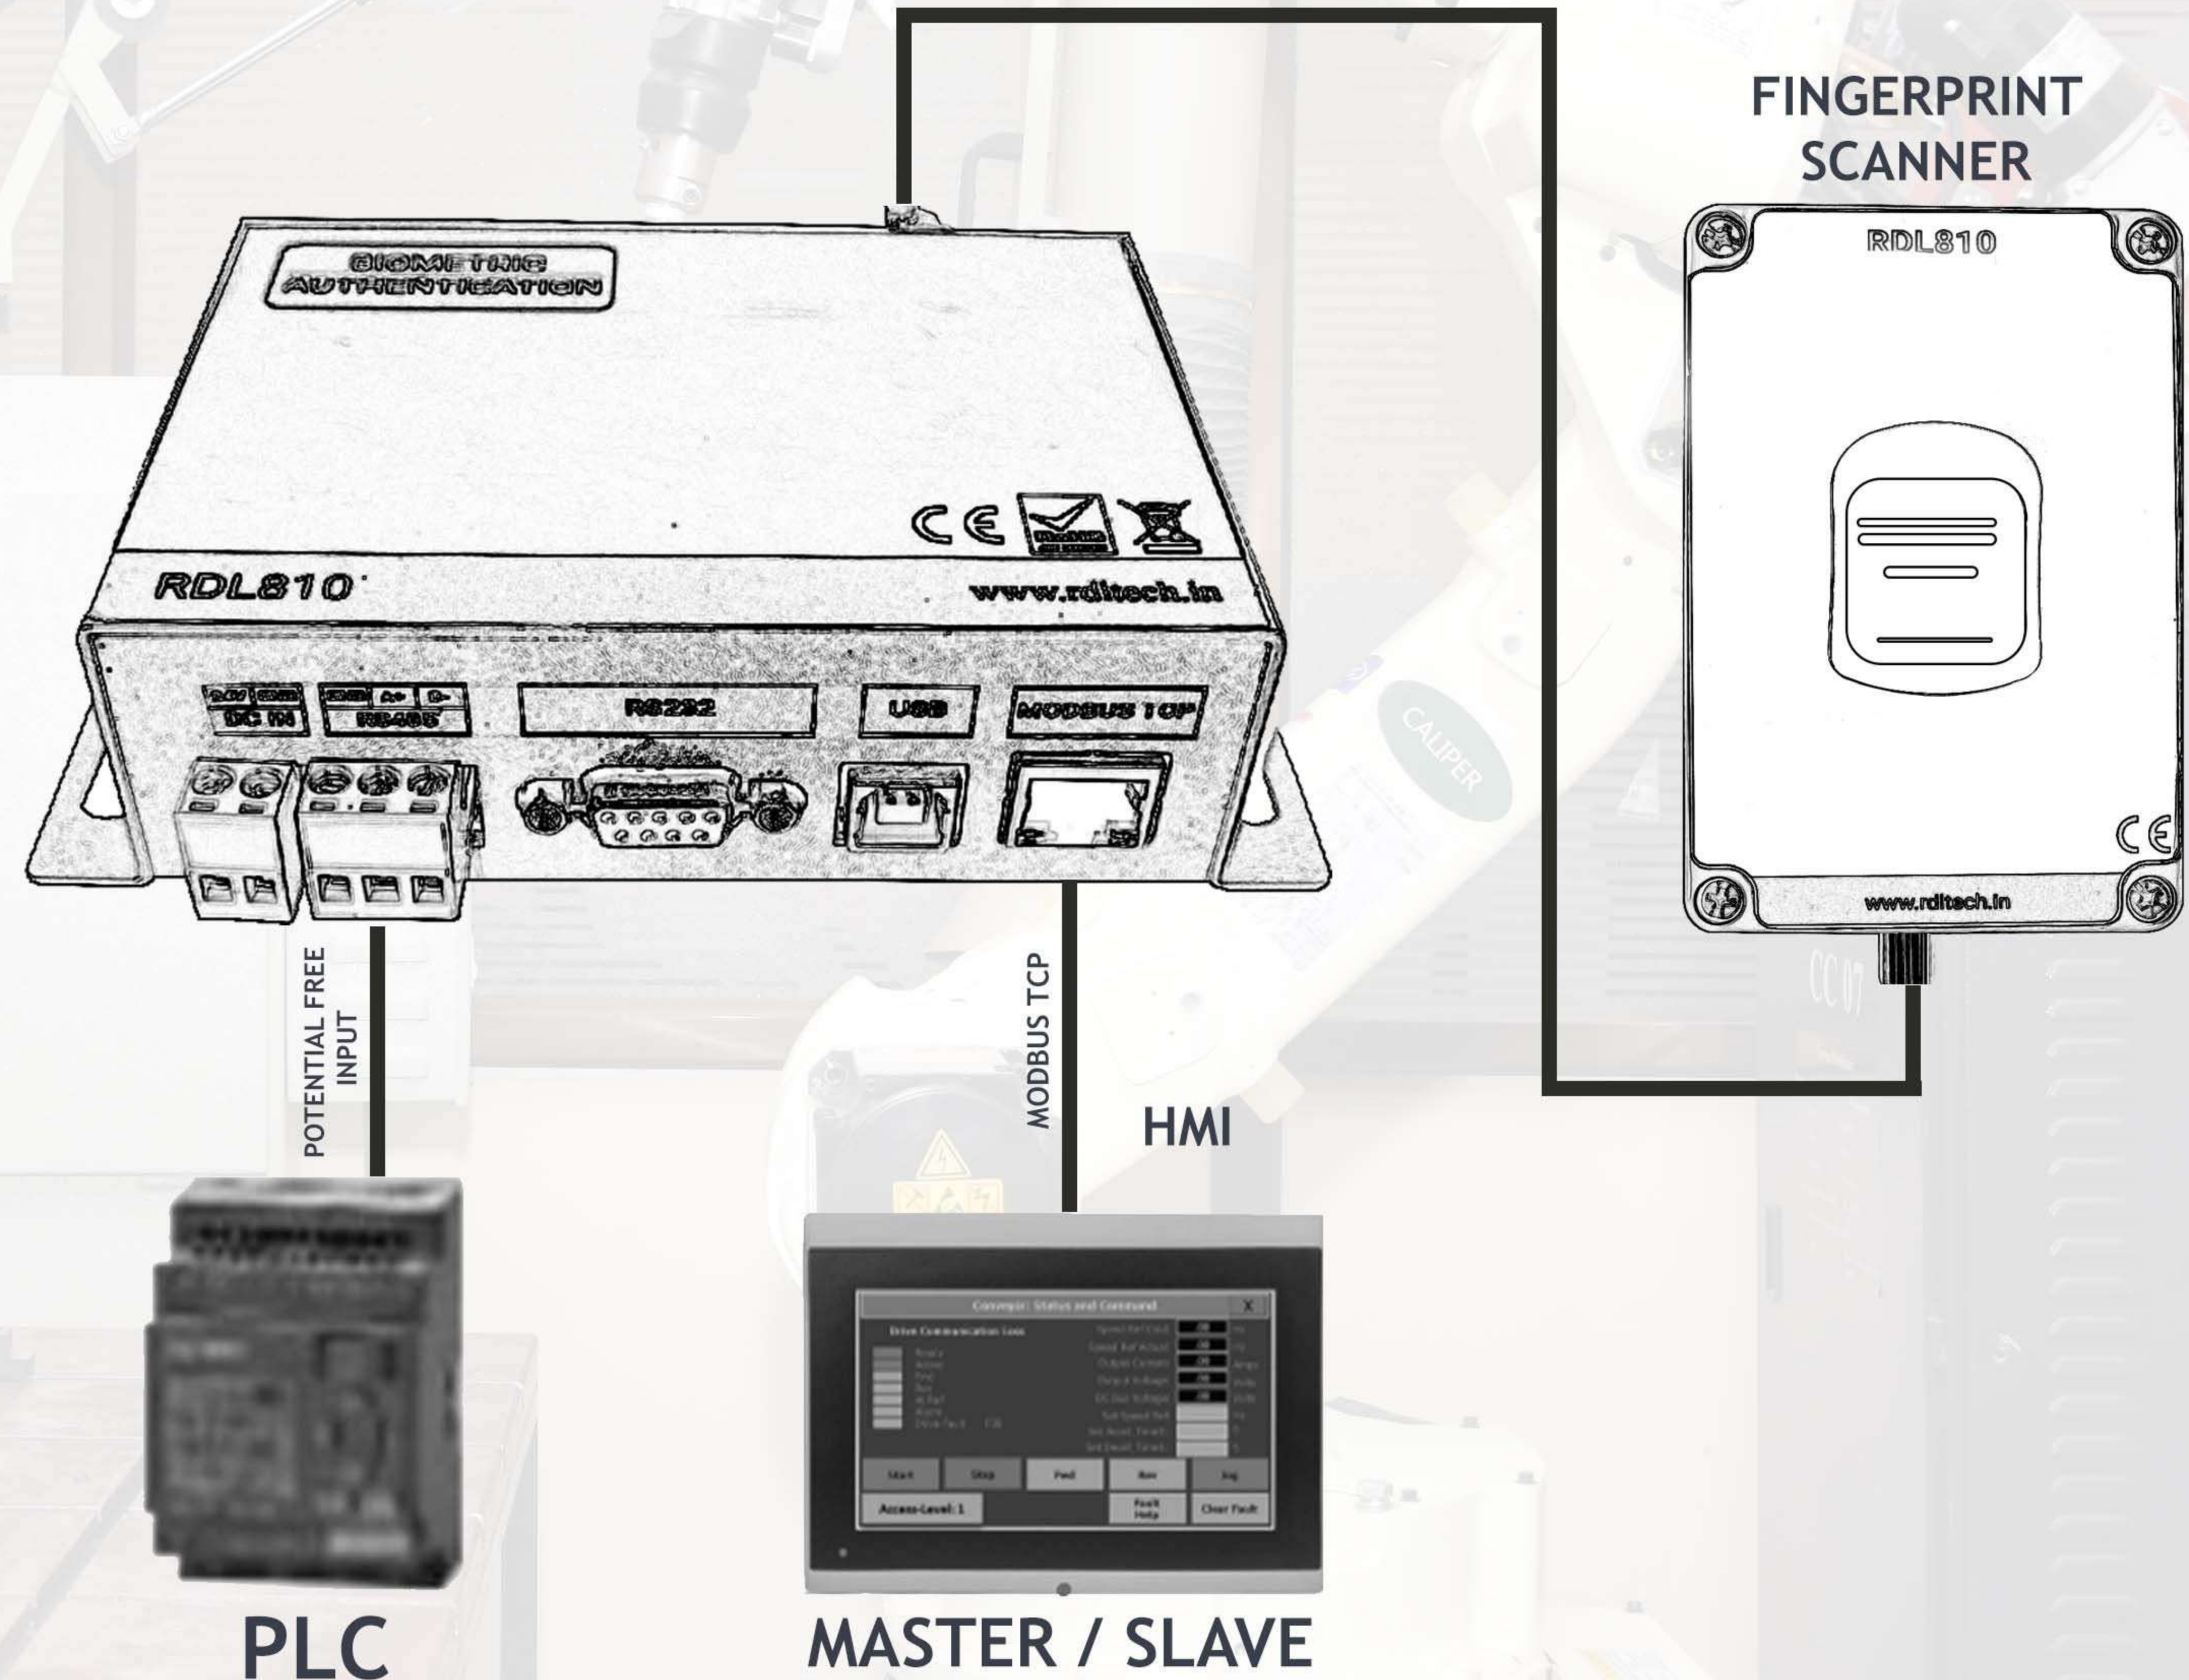




APPLICATION WIRING DIAGRAM - REMOTE ACCESS LOG SYSTEM

Production Loss Escalation

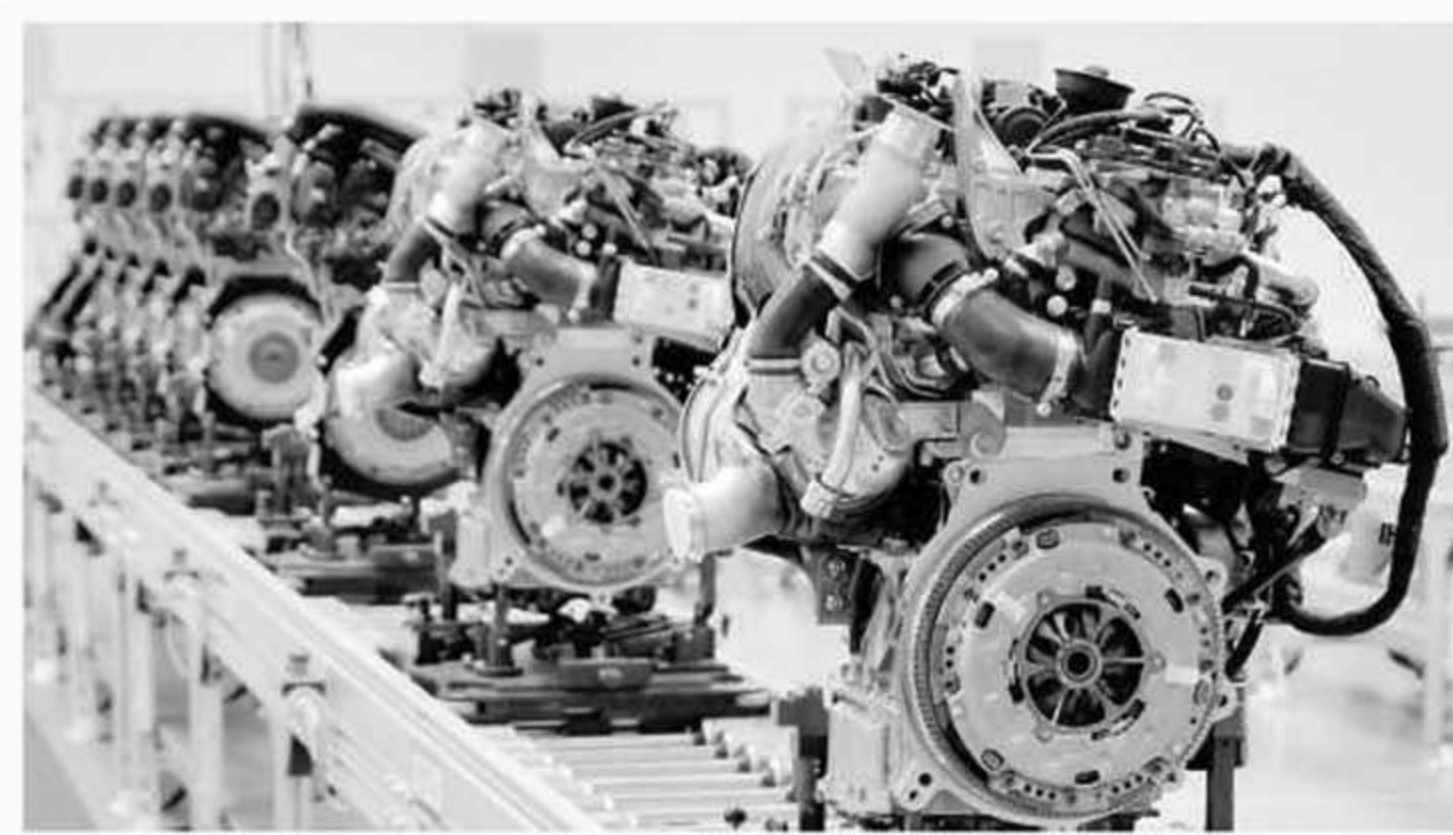

Accountability of floor managers during machine shutdowns, timely corrective actions to preventing losses.

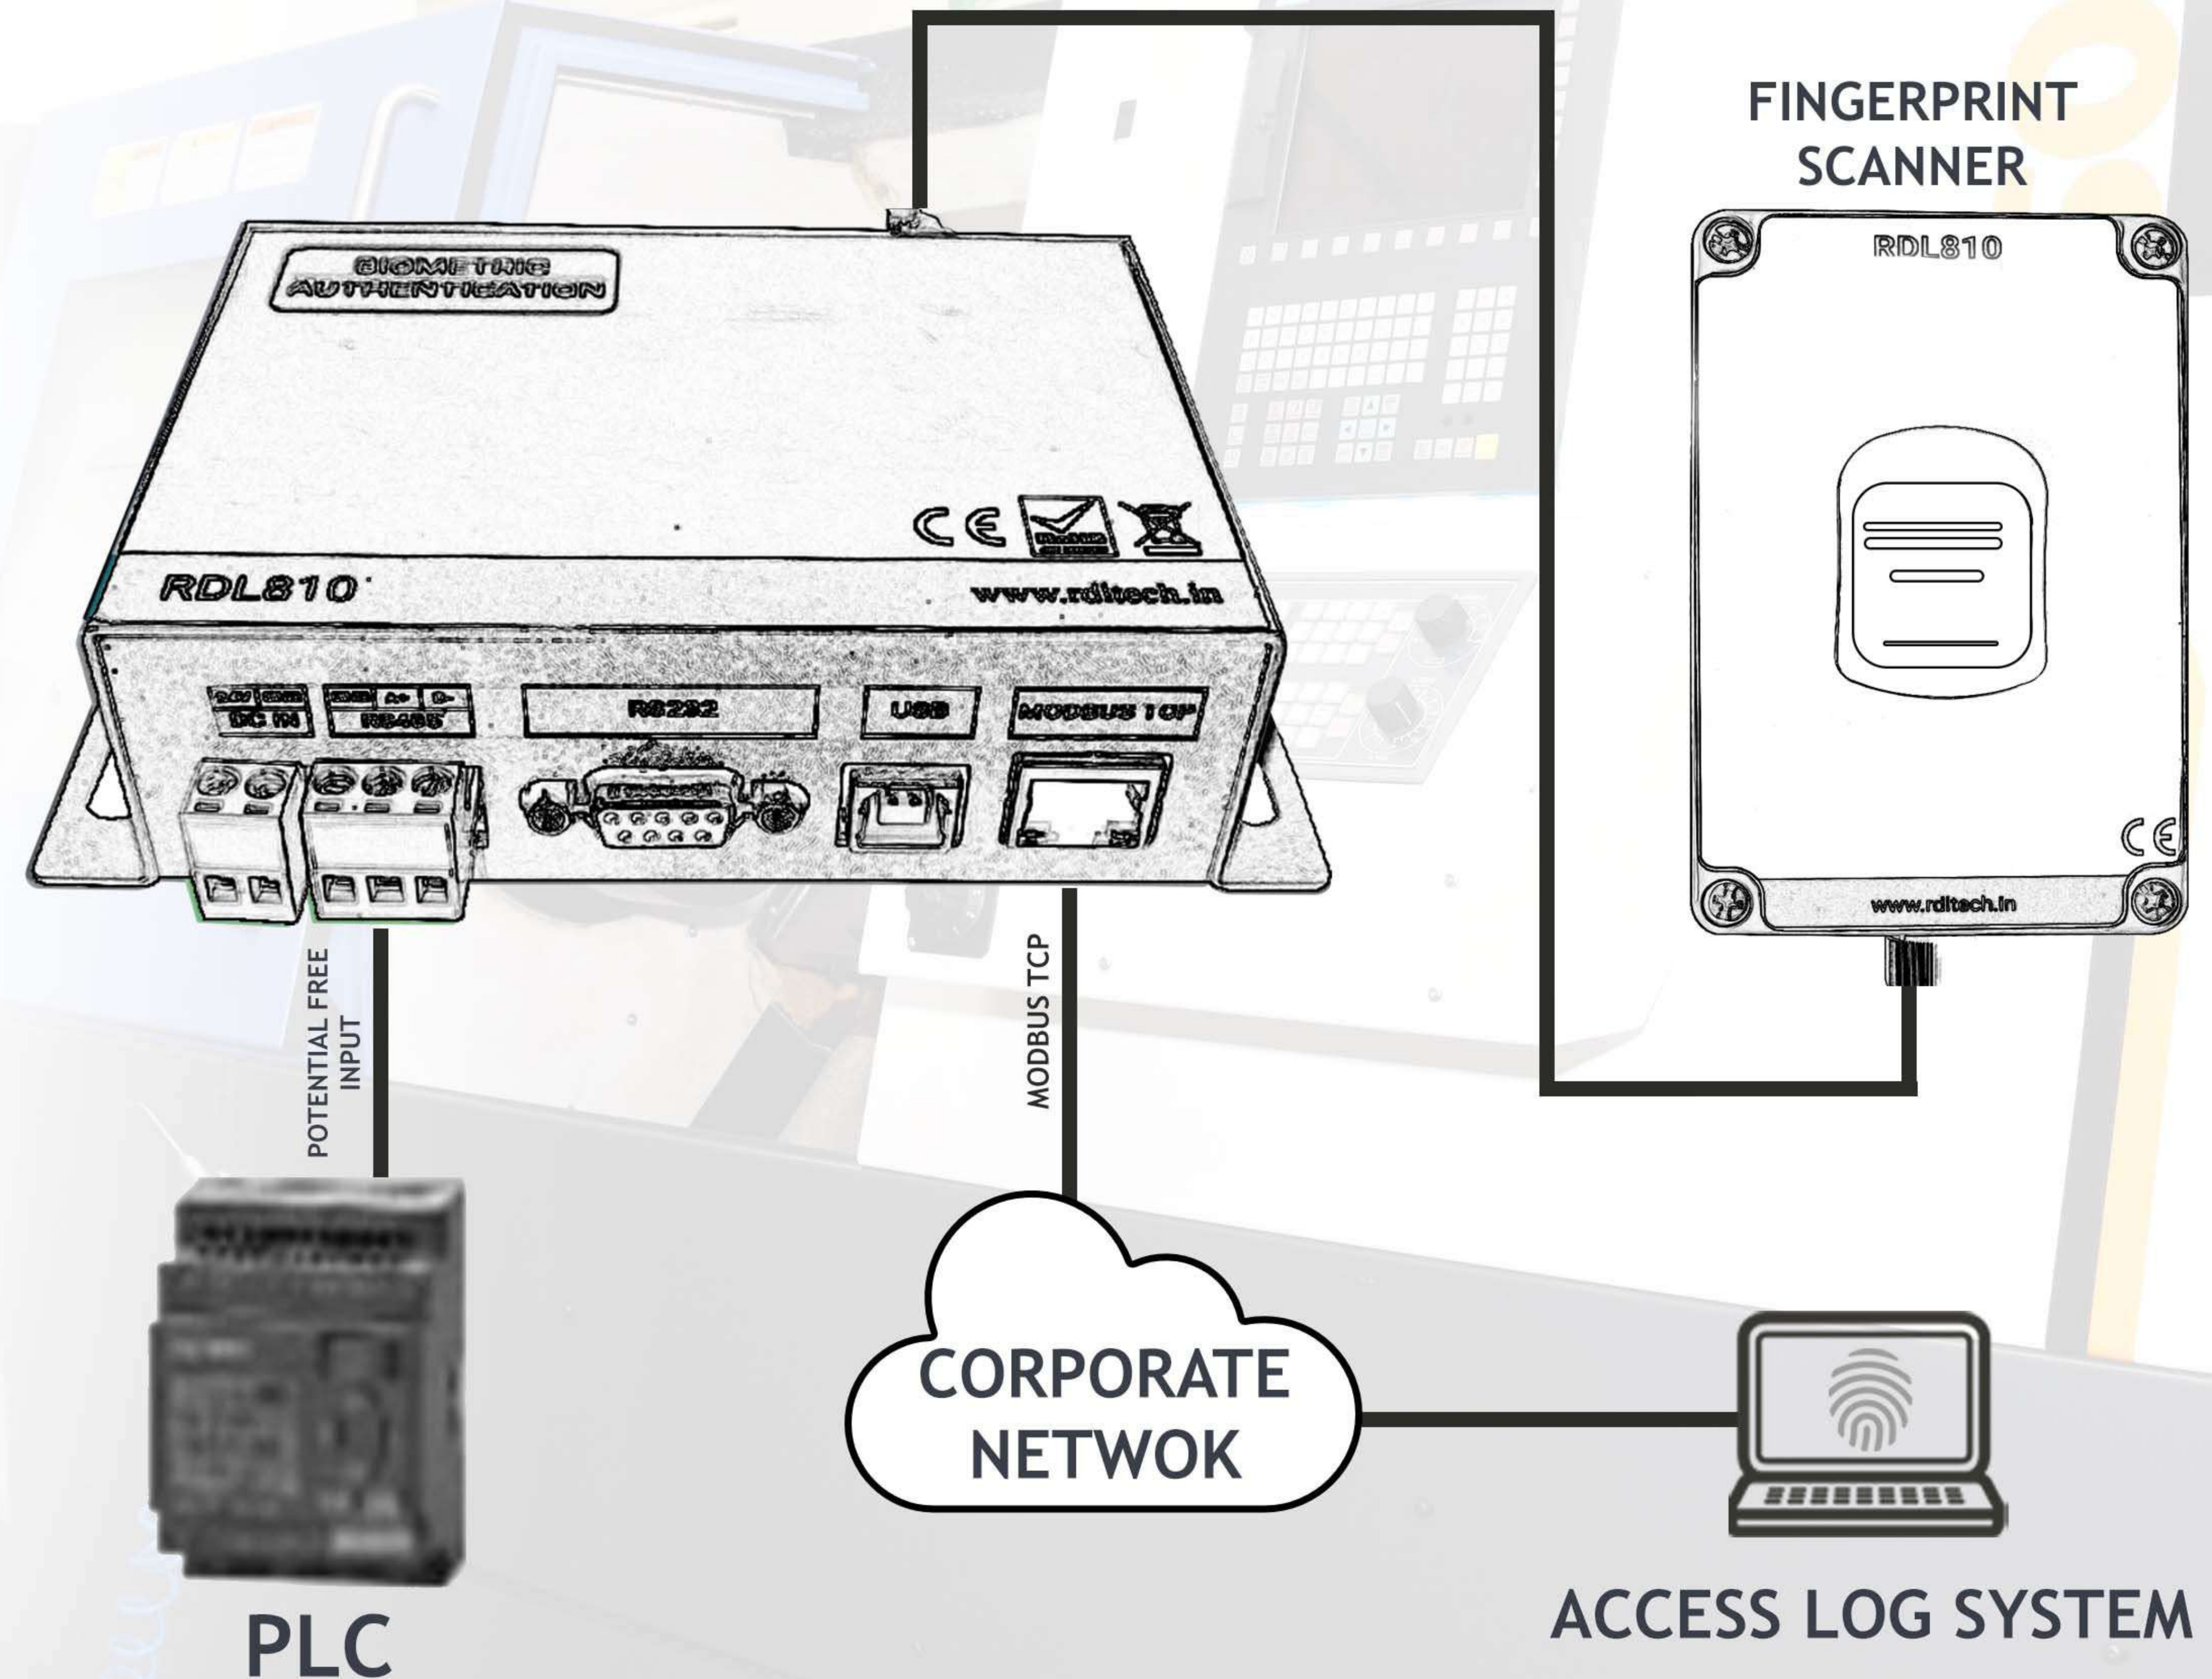




APPLICATION WIRING DIAGRAM - ANDON - BIOMETRIC AUTHENTICATION BASED SIGNAL RESET

Down Time Escalation




Track service teams response time towards break downs, reducing down time and improved productivity.

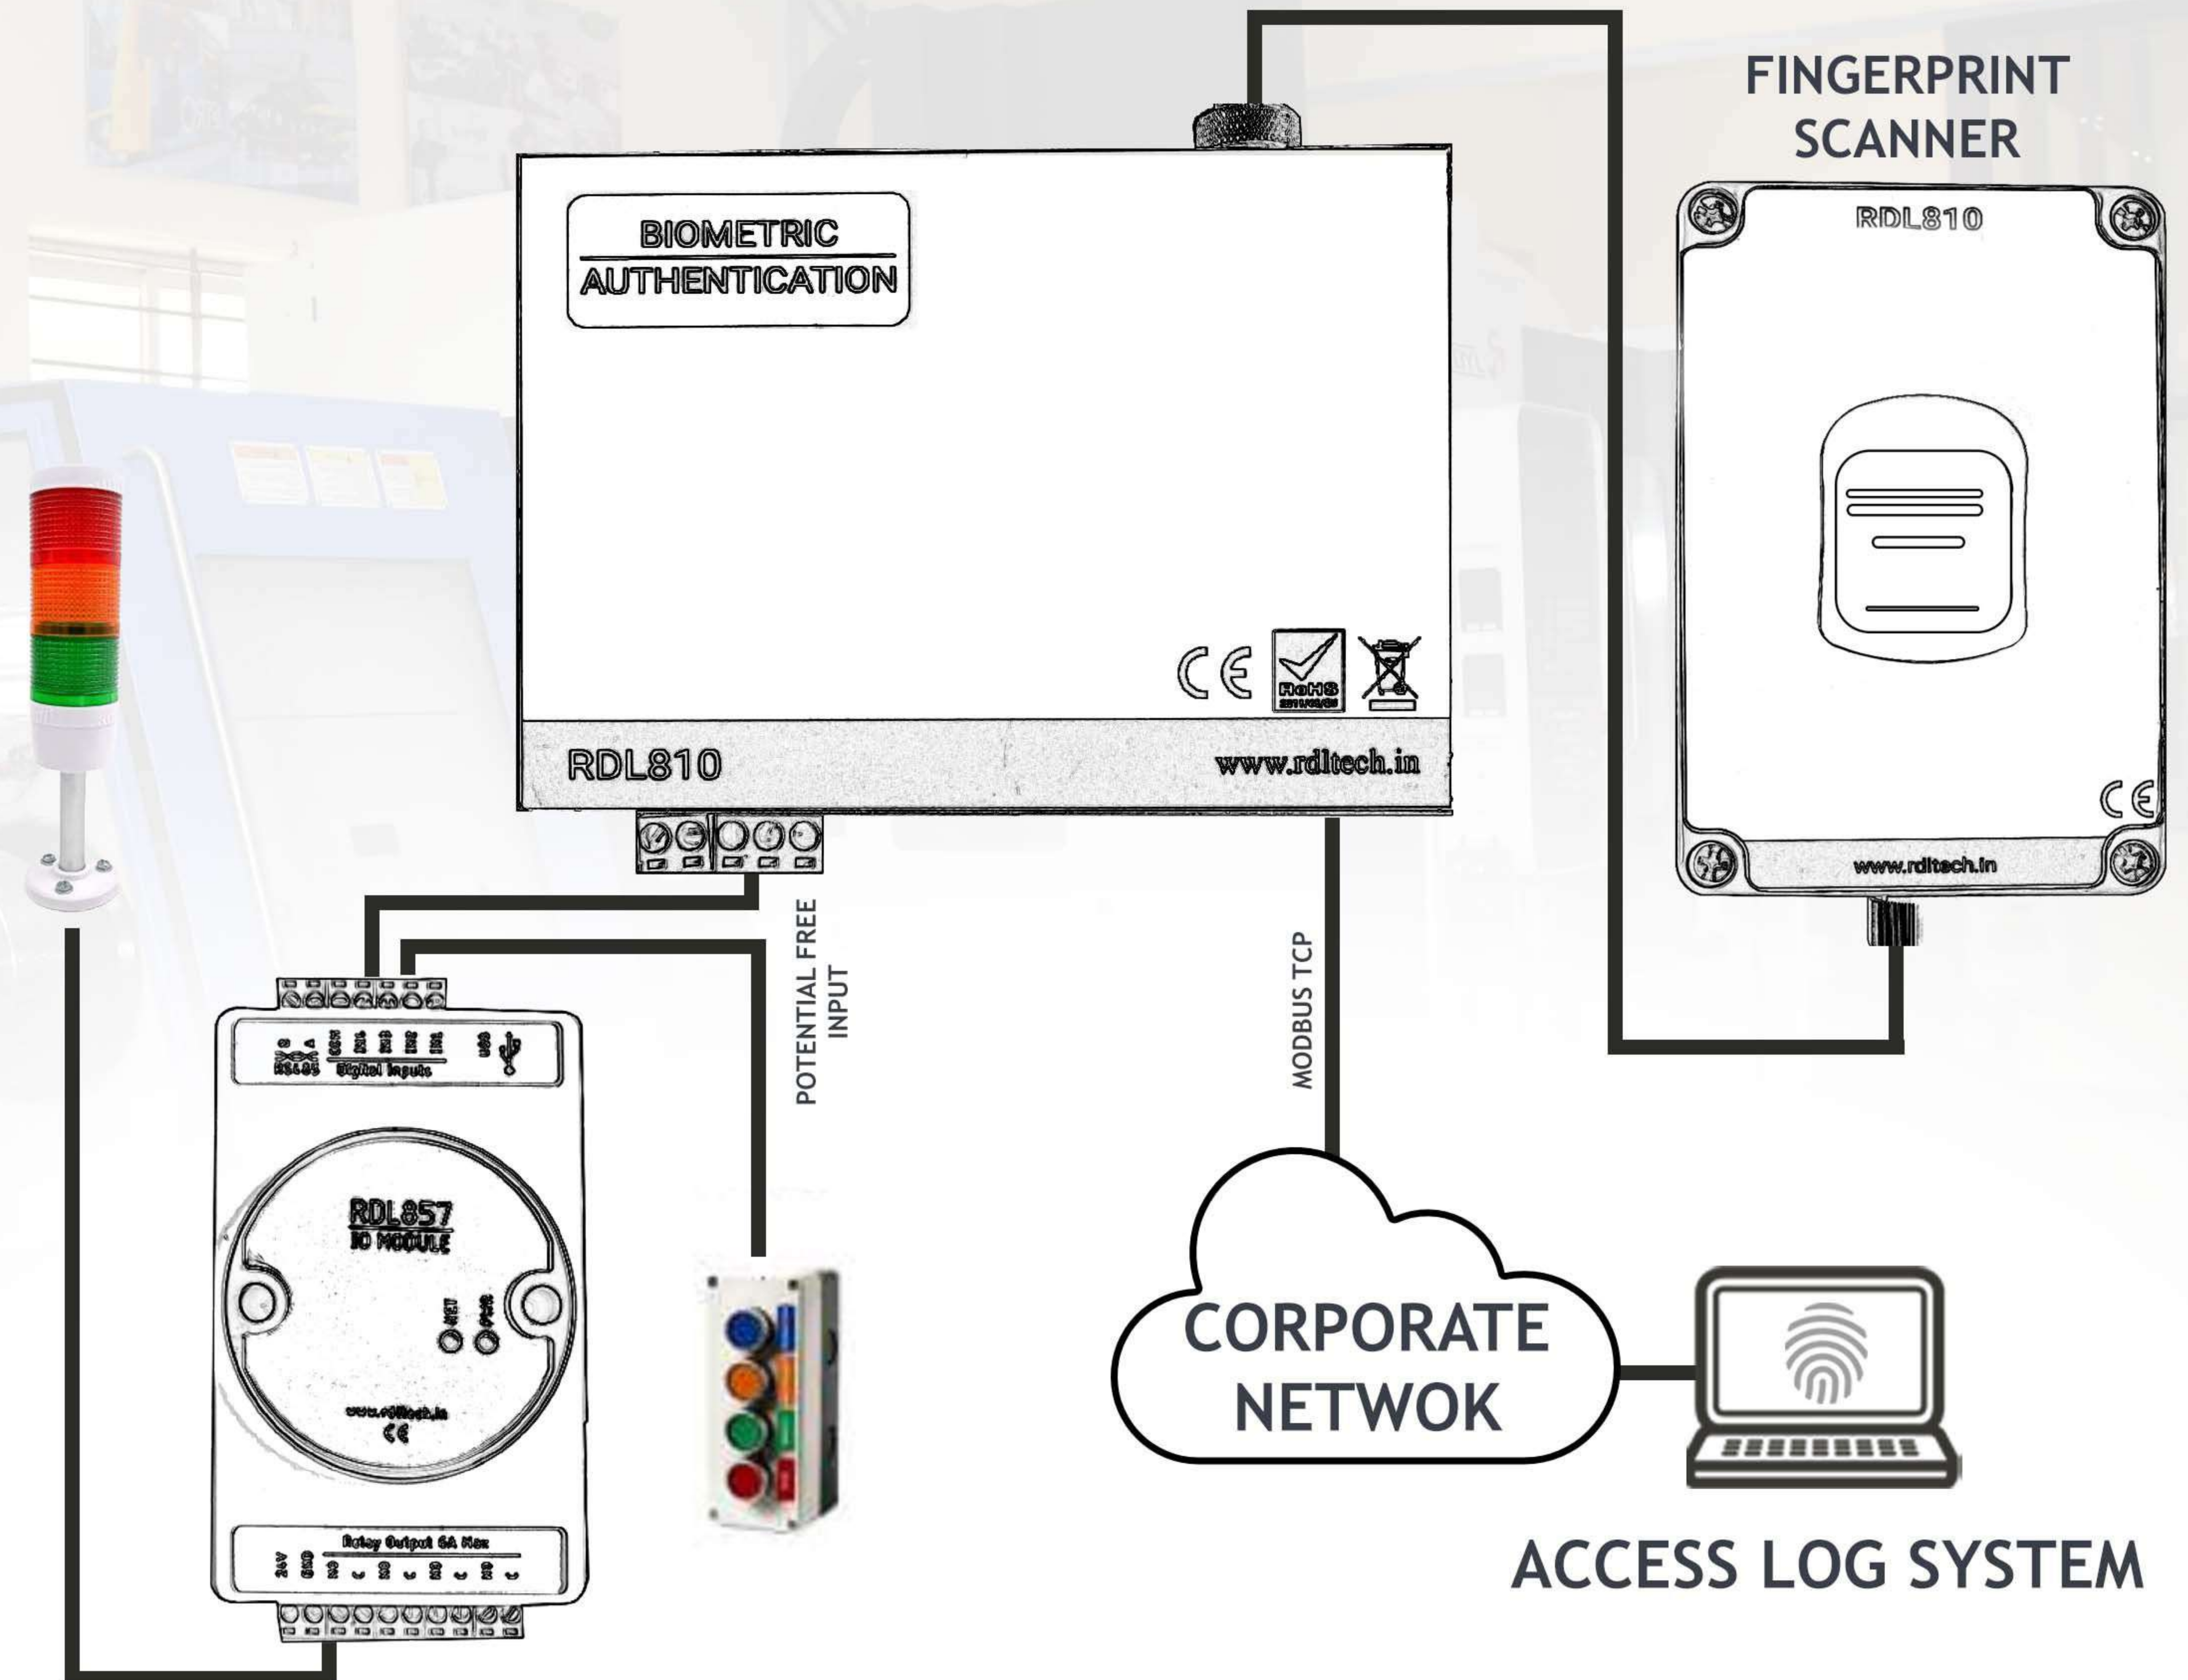




DIMENSIONS

Biometric Controller Unit

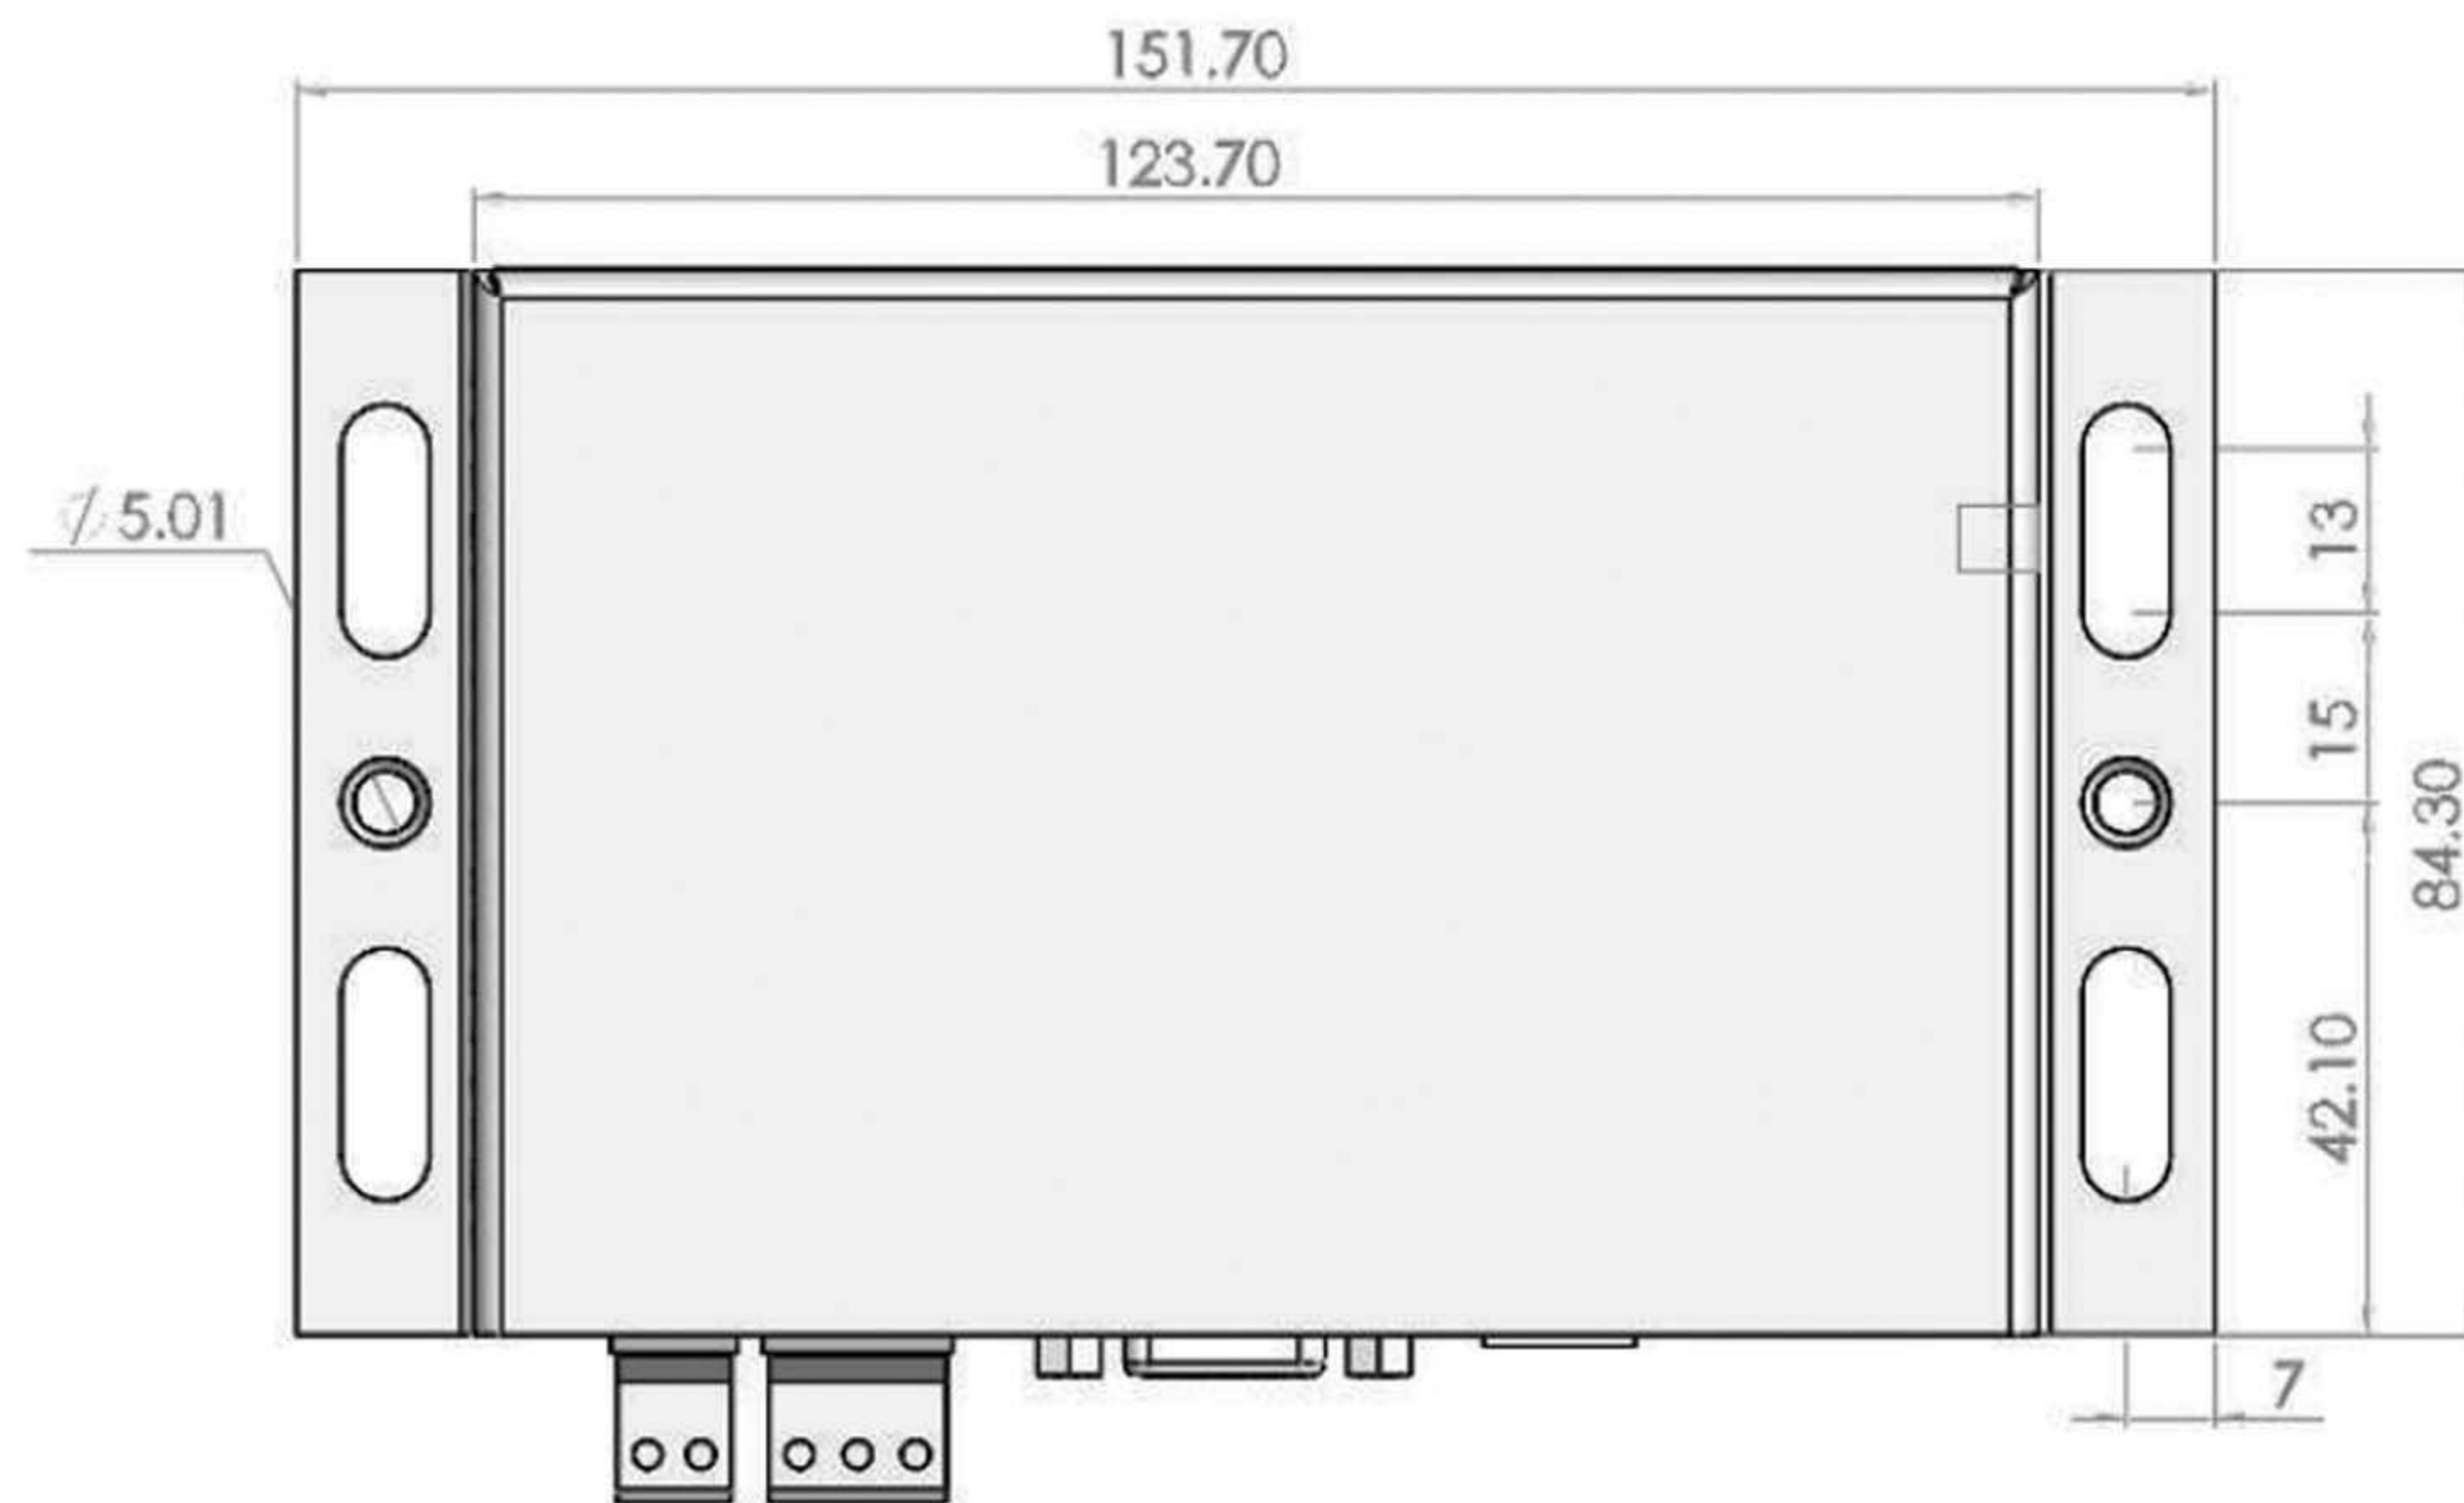

Finger Print Scanner

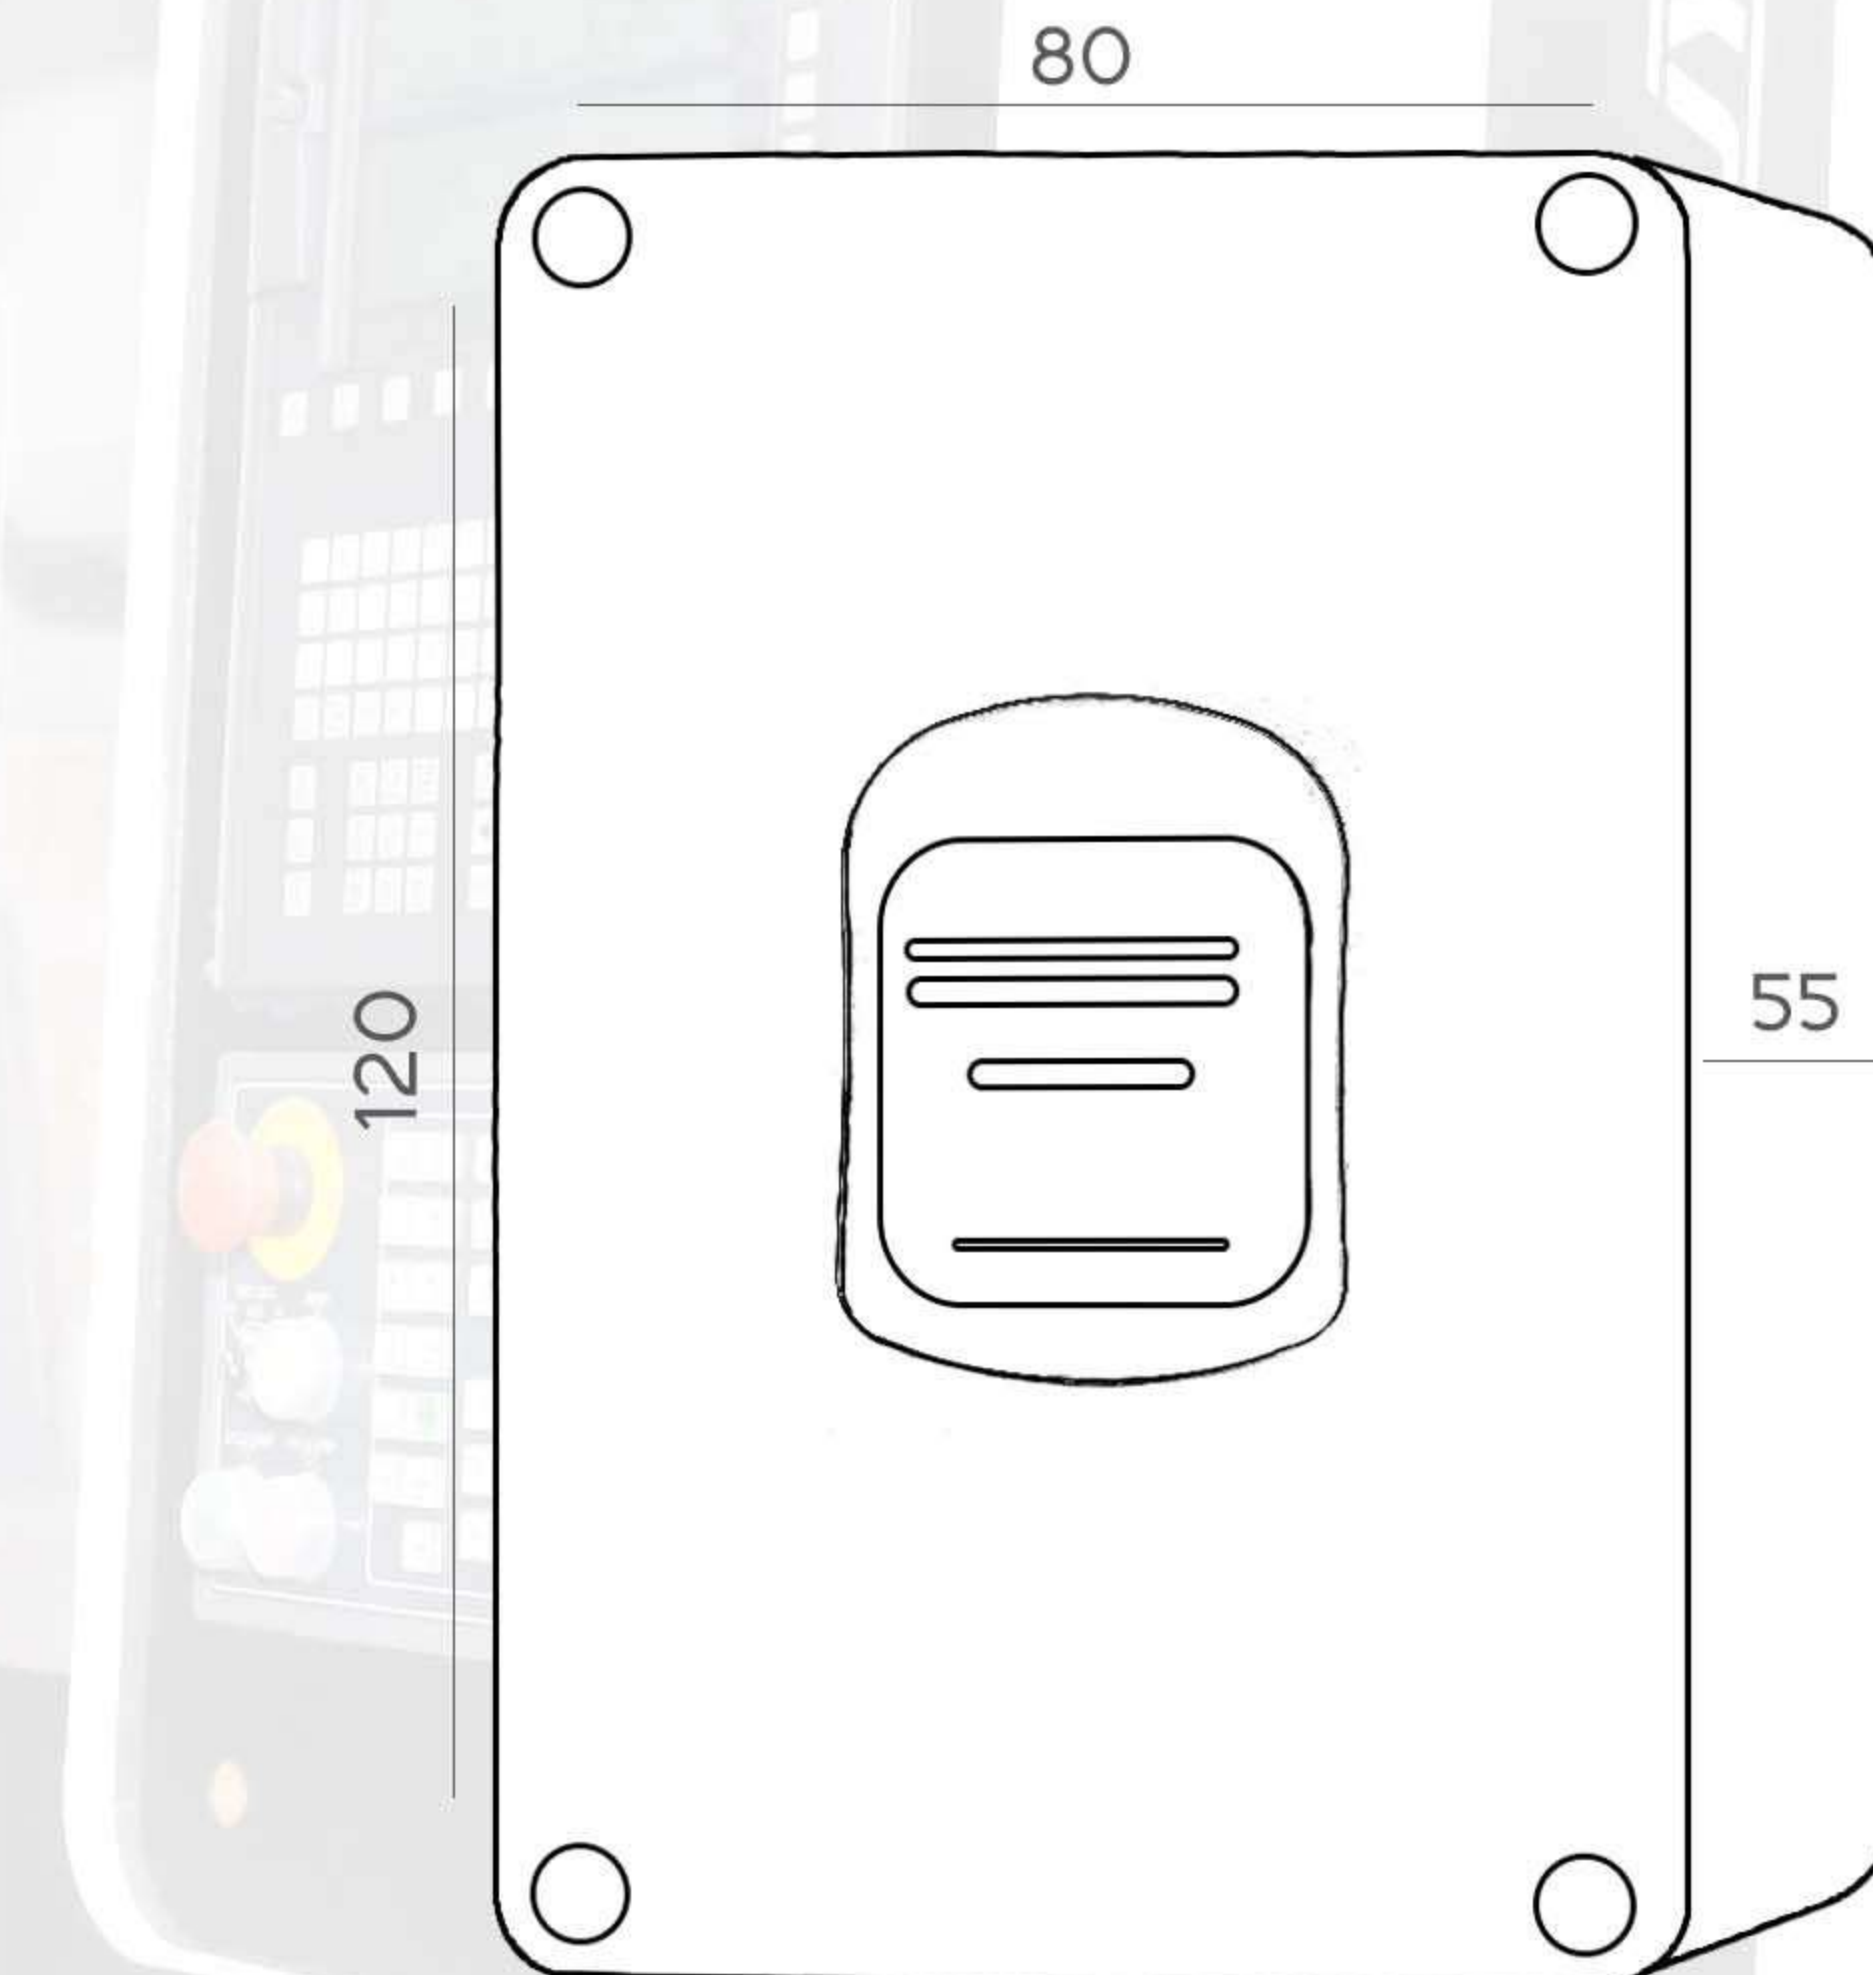



ORDER INFORMATION

	RDL810	RDL810A	RDL810B	RDL810C
RS485 RTU	✓	✓	✗	✗
MODBUS TCP	✓	✓	✓	✓
RS232	✓	✓	✓	✓
RELAY	✗	✗	✓	✓
FINGERPRINT READER WITH IP65 ENCLOSURE	✓	NA	✓	NA
RETROFIT FINGERPRINT SCANNER FOR CUSTOM MOUNT APPLICATION	NA	✓	NA	✓

Note:

1. Unless otherwise specified, all parameters in this datasheet were measured at 25°C and 75% humidity.
2. All index testing procedures in this datasheet are based on our company's corporate standards.
3. We can offer product customization; please contact the sales team directly for more information.
4. Specifications are subject to change without prior notice:
5. For additional information on Product please refer to www.rdltech.in
5. Buy online @ www.researchdesignlab.com

RDL Technologies Pvt Ltd

Address: 5th Floor, Sahyadri Campus, Adyar, Mangaluru – 575007

Mob: +91 8088423347

Tel: +91 824 2988407

Email: sales@rdltech.in

www.rdltech.in