


RPI IOT TRAINER KIT




PLUG & CODE



OTA / ON BOARD
PROGRAMMING

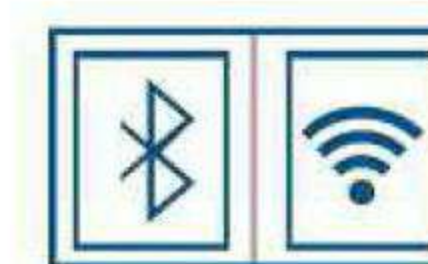

ON BOARD WIFI &
BLUETOOTH



1 GHz Single
Core CPU



RoHS
2011/65/EU




START YOUR IoT JOURNEY TODAY..!

RPI 0 essential development features a plug and play design that makes it easy for connections and helps Students, hobbyists, enthusiasts, and professionals to focus more on Program/ application development. RPI 0 IoT Trainer Kit equipped with on board IO's, communication interfaces & peripherals. It is really easy to design, experiment with, and test circuits without soldering. It's used in many educational institutions and R&D LAB across the world.

Board Features

- On Board Programming.
- Plug & Play Interface Connectivity.
- Professional EMI/RFI Complaint PCB Layout Design
- Modular Block design makes Easy access & quick Prototyping
- FRC connectivity features minimize the connection Error.
- ROHS Compliant High Quality Grade PCB with wooden Enclosure.
- Open-source Hardware RPI 0 Single core 32-bit up to 240 MHz, Flash 16 MB.
- Supported most of the open-source platforms for Custom Programming
- The device offers multiple industrial protocols like MODBUS RTU, MODBUS TCP, JSON, MQTT, and FTP and supports secure communication SSL.
- Supported most of the cloud platforms including Microsoft Azure & AWS etc
- OTA Firmware upgrade supported
- On Board Programming.
- Plug & Play Interface Connectivity.
- Supported communication over USB, WiFi, Bluetooth, and Modbus RTU and RS232
- Supported DC 12V Power Supply.

SUPPORT MOST OF THE POPULER CLOUD PLATFORM

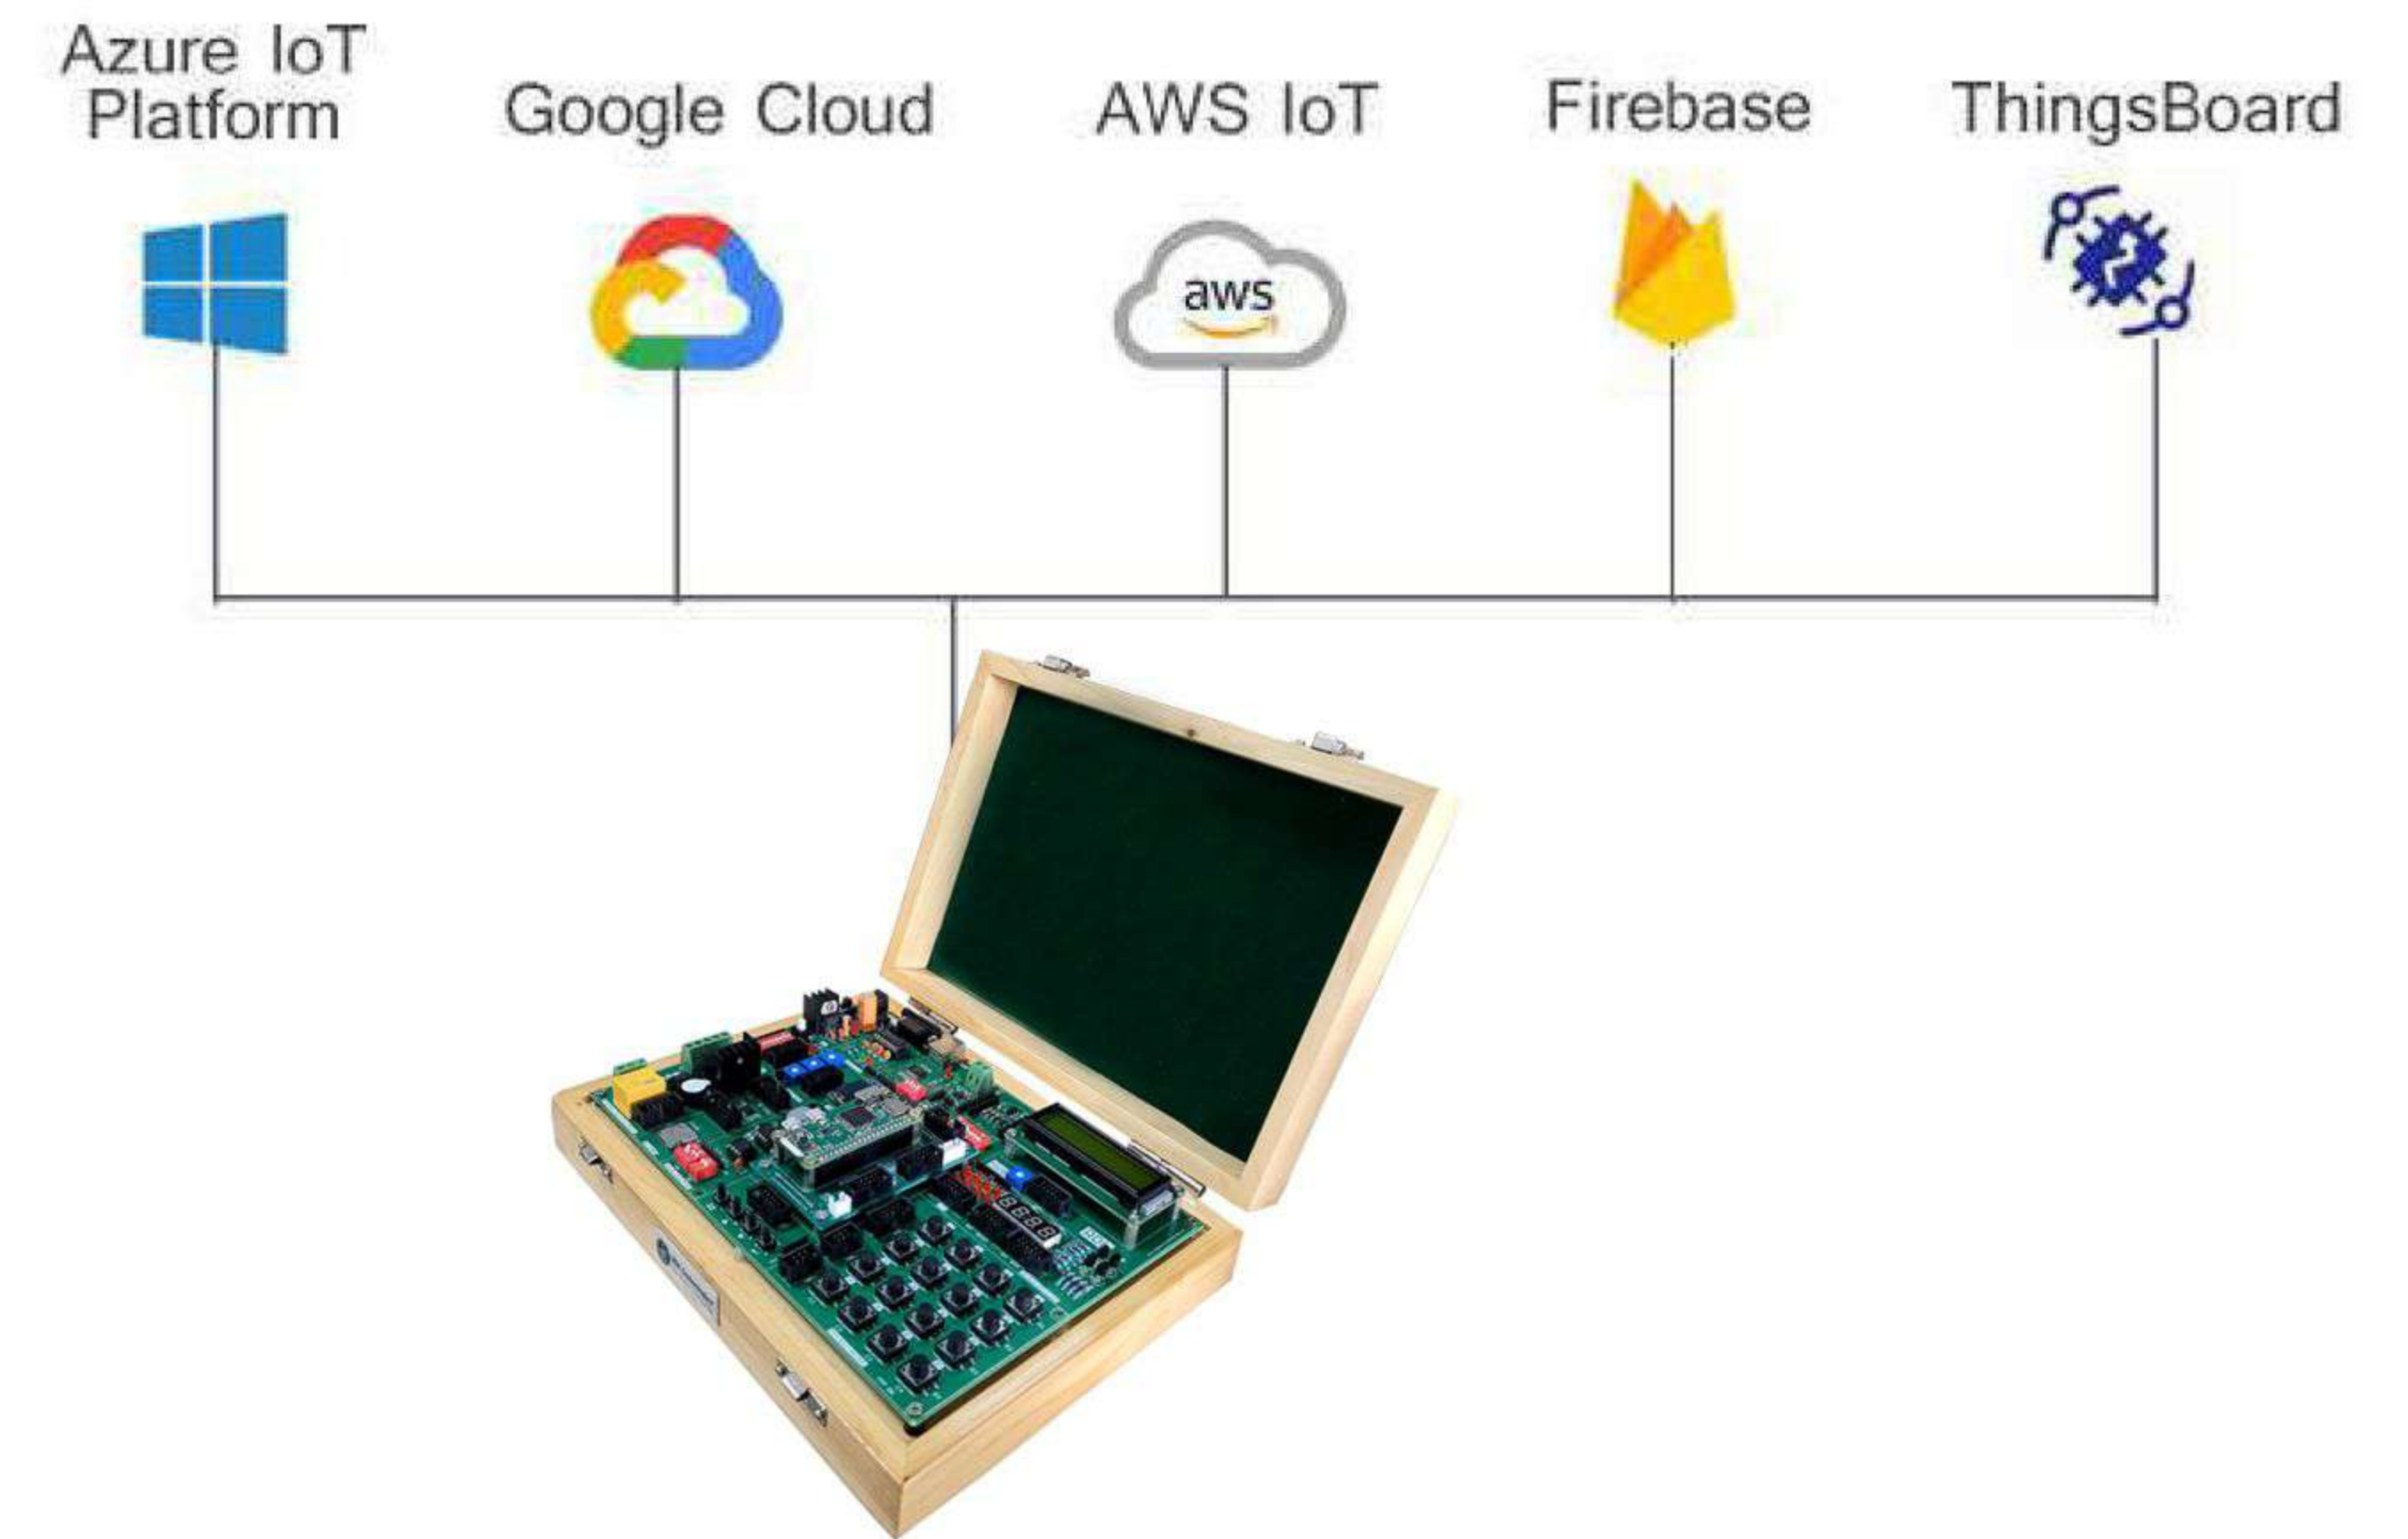

Applications


- Generic Low-power IoT Sensor Hub
- Generic Low-power IoT Data Loggers
- Cameras for Video Streaming
- Over-the-top (OTT) Devices
- Speech Recognition
- Image Recognition
- Mesh Network
- Home Automation
- Smart Building
- Industrial Automation
- Smart Agriculture
- Audio Applications
- Health Care Applications
- WiFi enabled Toys
- Wearable Electronics
- Retail & Catering Applications



Scope of Learning Experiments:

- | | |
|---|--|
| • LED blinking. | • L298 Driver for DC Motor and Stepper |
| • 8 bit LED Left shift, Right shift and counting operation. | motor interface. |
| • Keypad Interrupt Interface | • Communication using UART, I2C, & SPI |
| • 6*2 LCD interface. | • Buzzer, Relay interface. |
| • Matrix Keypad Interface. | • RS485, RS232 serial communication. |
| • Traffic Light Signal Interface. | • RPI 0 IO Interfacing with different sensor |
| • 8 bit DIP switch interface. | • RTC DS1307I2C protocol interface. |
| • 7 Segment interface. | • AT24C04 EEPROM I2C protocol interface. |
| | • Wifi Communication. |

Supported language and development environment

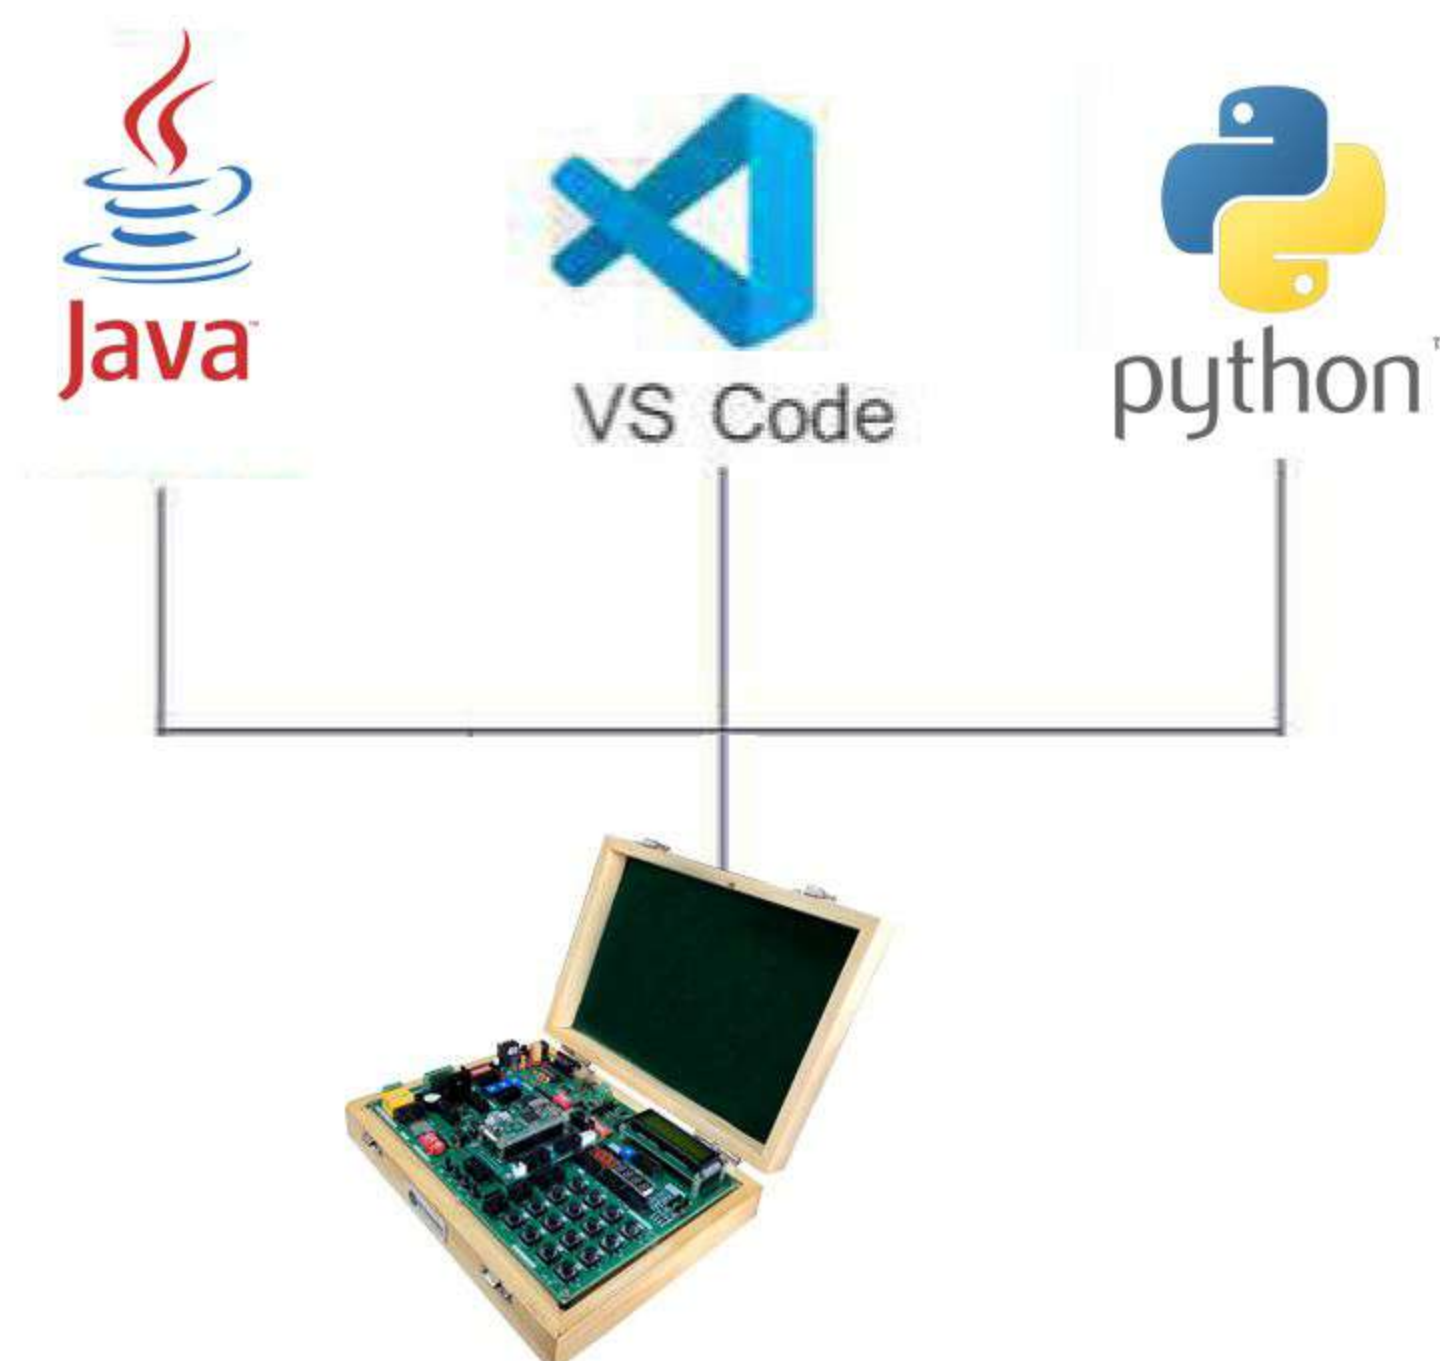

- | |
|---|
| • Interfacing SD card and handling file system |
| • Interfacing sensor with & Data parsing using RESTful & Json protocol |
| • FTP Implementation |
| • Interfacing sensor with RPI 0 and MQTT protocol Implementation
Exploring MQTT Features Subscribe & Publish methods |
| • MQTT SSL certificate implementation - RPI 0 |
| • Interfacing RS485 slave using MODBUS protocol |
| • Interfacing BLE & Data parsing using RESTful/Json/MQTT protocol |
| • Text to speech implementation |
| • Device control through Speech recognition & Alexa Integration |
| • Appliance control through cloud platform using MQTT protocol |
| • Environment data like temp & humidity capturing using cloud platform |
| • Modbus RTU Communication and accessing data from Industrial PLC |
| • Wireless TCP/IP socket connection implementation using node and server architecture |
| • BioMedical sensor kit integration and connecting IoT cloud platform for prediction |
| • Implementation of RPI 0 WEB server application |



SPECIFICATION

MCU

- 1GHz, Single-core CPU
- 512MB RAM
- Mini HDMI® port and micro USB On-The-Go (OTG) port
- Micro USB power
- HAT-compatible 40-pin header
- Composite video and reset headers
- CSI camera connector

BLUETOOTH® / BLE

- Bluetooth 4.1
- Bluetooth Low Energy (BLE)

Wi-Fi

- 802.11 b/g/n Wireless LAN

Hardware

Interfaces: SD Card UART, SPI, SDIO, I2C, LED PWM, Motor PWM, I2S, IR, pulse counter, GPIO, capacitive touch sensor, ADC, DAC Two-Wire Automotive Interface.

Communication Interface: RS232, RS485 (Modbus RTU), USB, SPI, I2C.

DISPLAY INTERFACE

- OLED 0.96"
- 16X2 LCD Display
- Seven Segment Display

KEYPAD INTERFACE

- 4X4 Hex Keypad
- 1X4 1X4 Menu Keypad

MEMORY INTERFACE

- SD Card Interface
- EEPROM AT24C08

DRIVERS, RELAY & BUZZER

- DC Motor/Stepper Motor
- Buzzer

ON BOARD SENSOR, TESTING INPUT POT & SWITCHES

- 1X Temperature & Humidity Sensor
- 8X Selection DIP Switch

CONVERTER & ADAPTER INTERFACE



- Xbee Adopter
- 3.3V to 5V Level Converter
- **REAL TIME CLOCK (RTC)**
- RTC DS1307

ON BOARD POWER POINTS

5V, 3.3V & GND




ESP-32 BOARD NARRATION

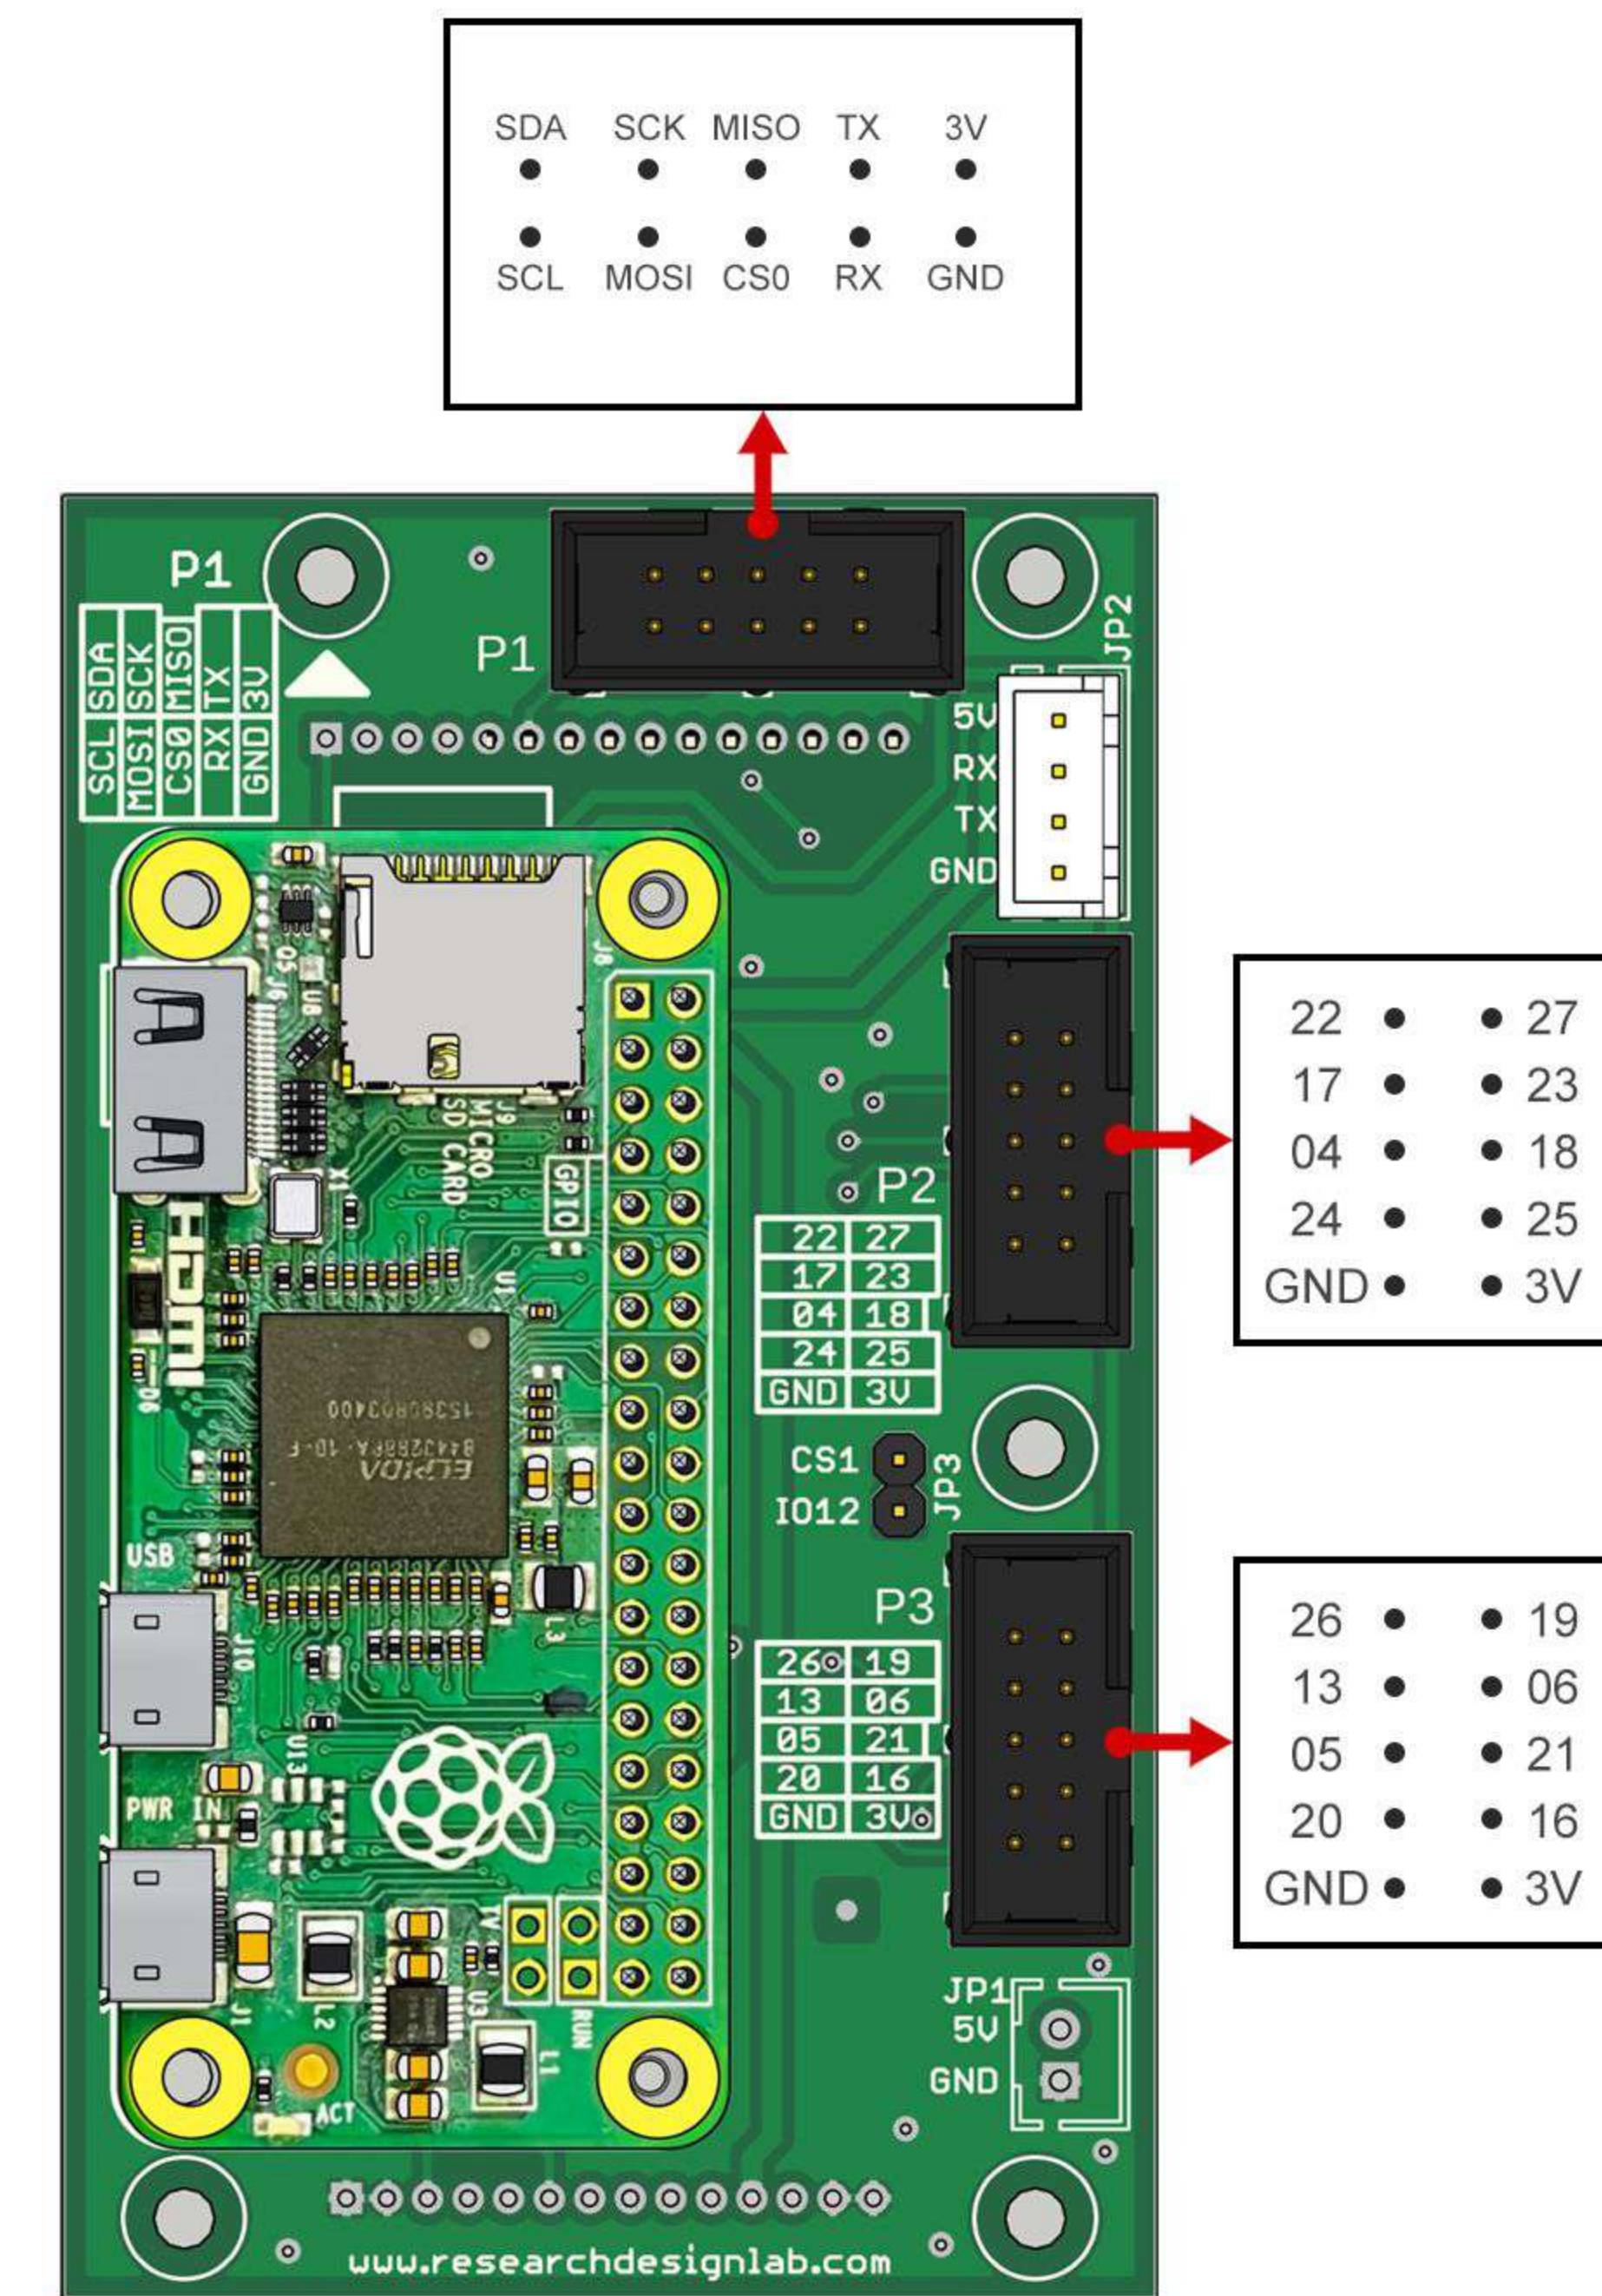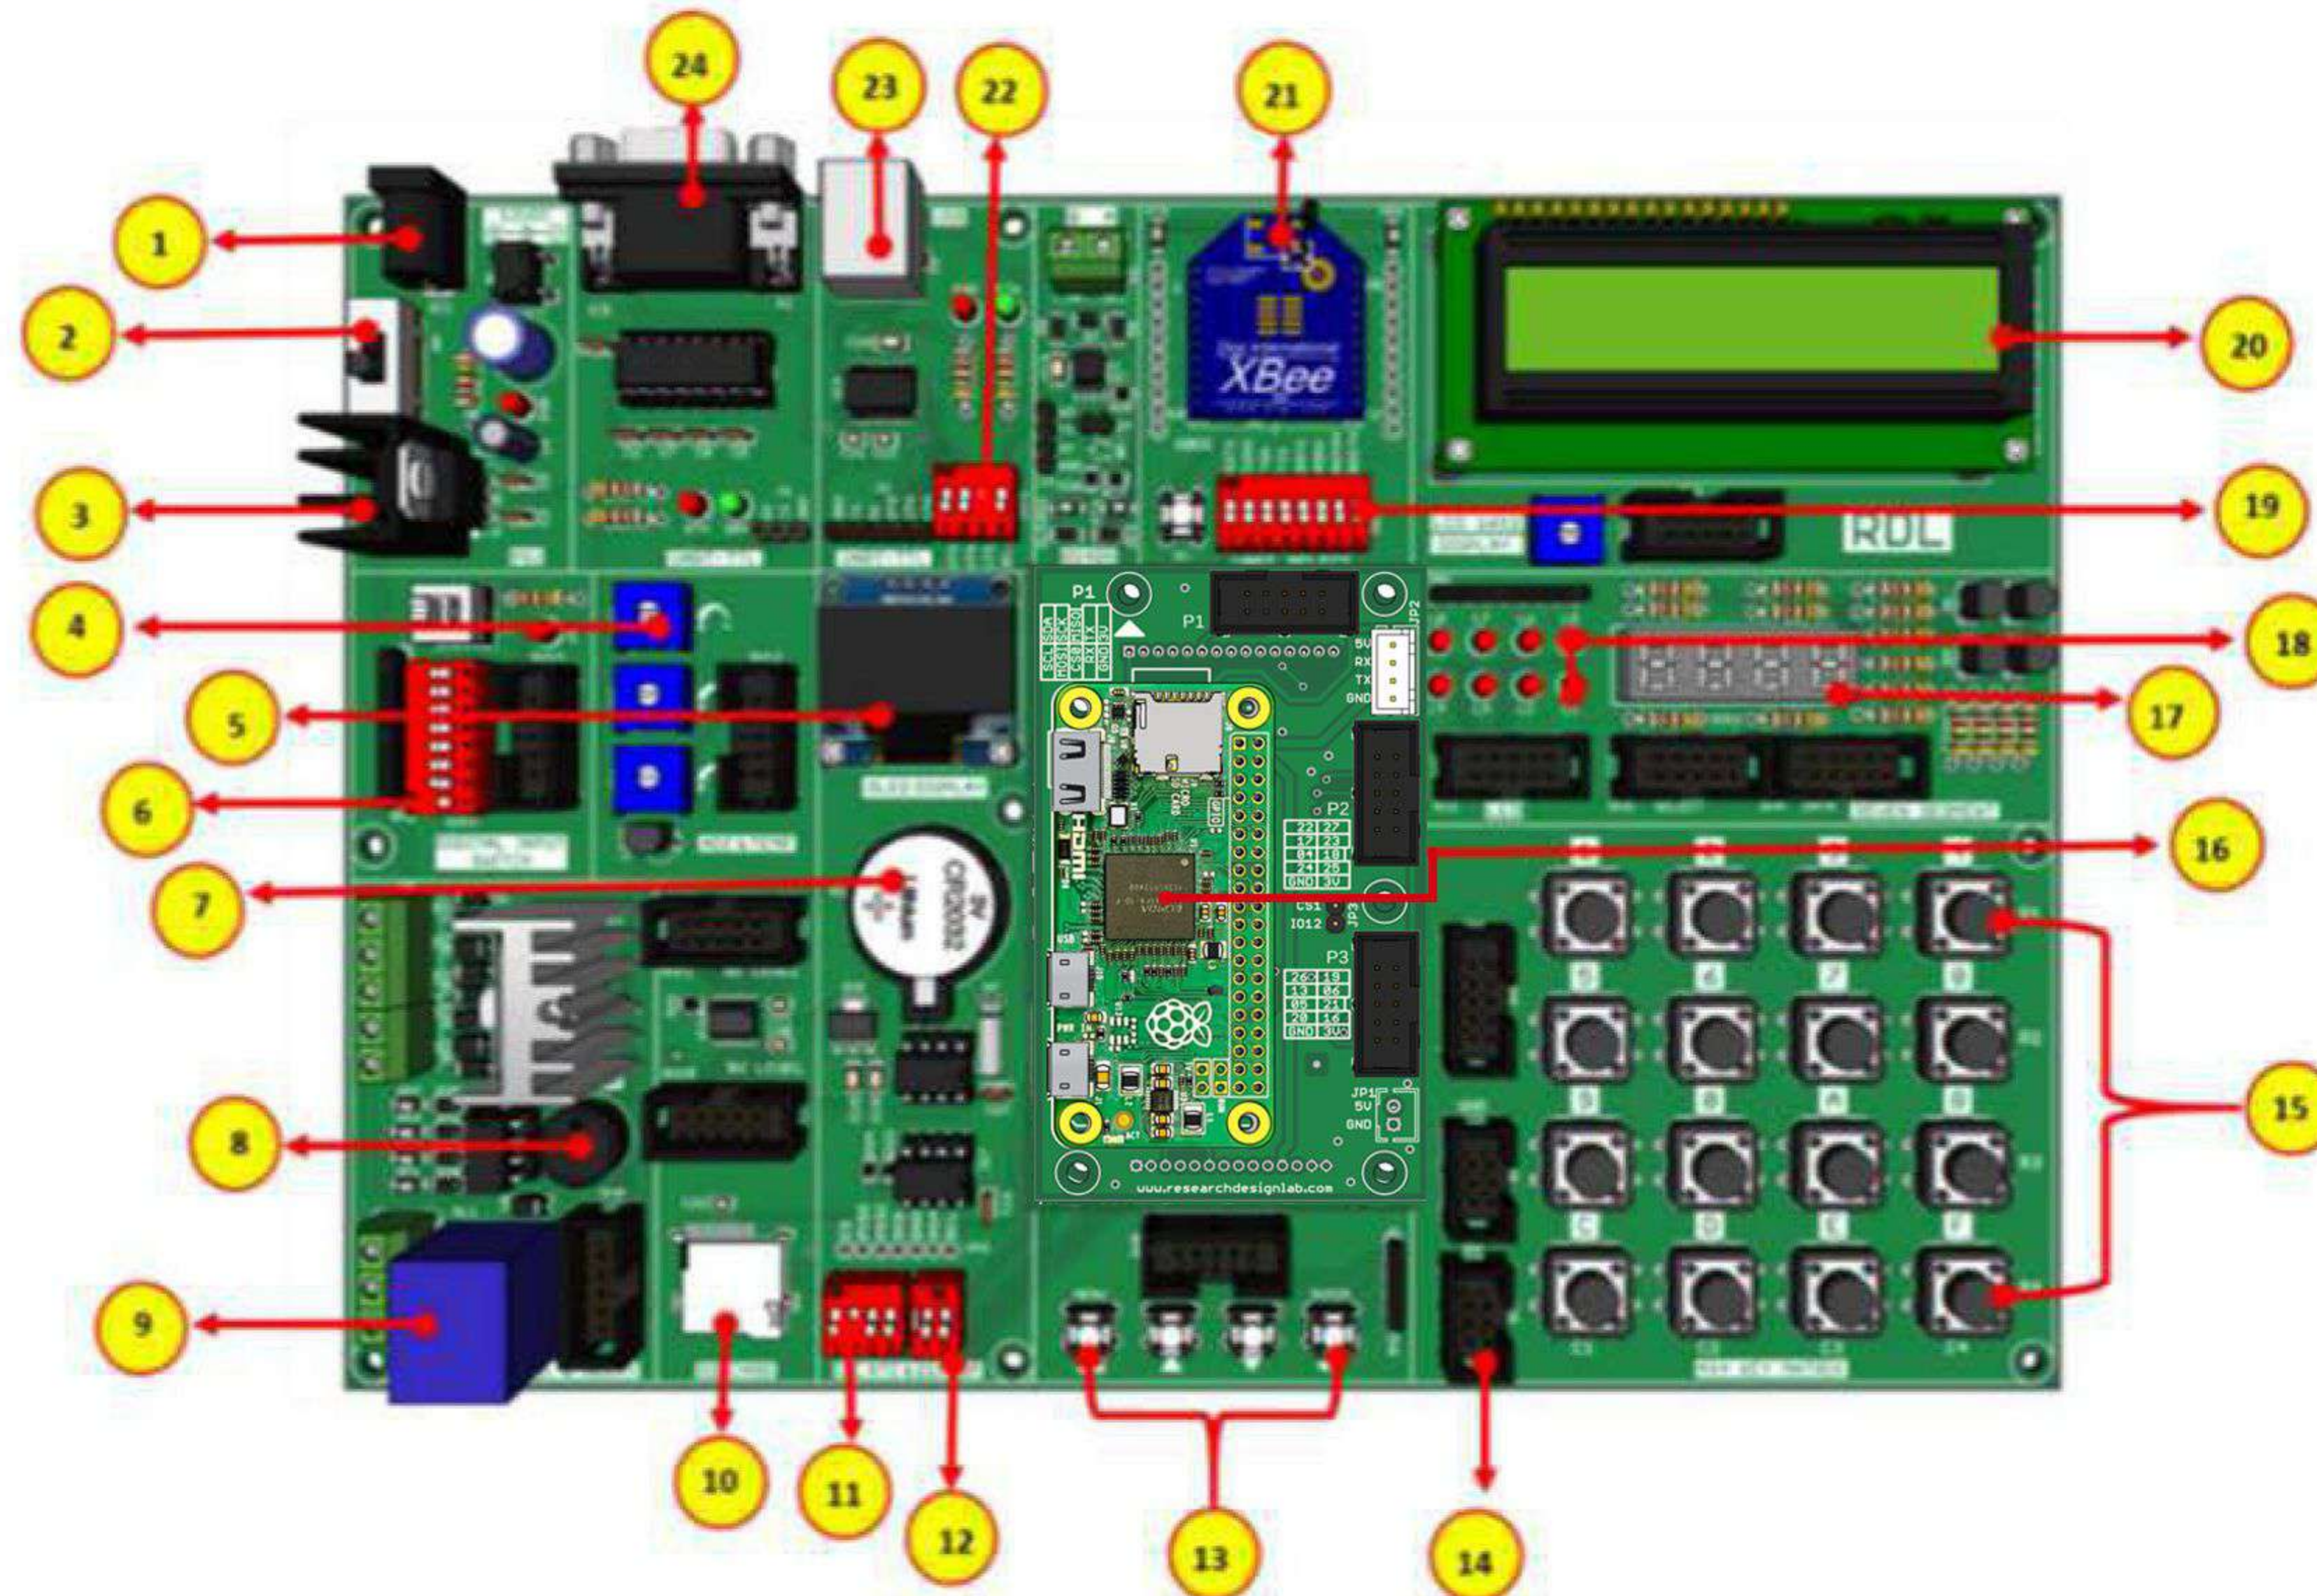


- | | | |
|--------------------------------|---------------------------------|--|
| 1. Power Supply | 9. Relay | 17. 7 Segment Display |
| 2. Power ON Switch | 10. SD Card Holder | 18. 2*4 LED's |
| 3. Heat Sink | 11. Jumper Settings for I2C RTC | 19. 16*2 LCD Display |
| 4. ADC (Variable Resistor POT) | 12. Jumper Settings for EEPROM | 20. Jumper Settings for UART TTL |
| 5. OLED Display | 13. 1*4 Keypad Switches | 21. USB Port |
| 6. Digital Input Switch | 14. 4*4 Keypad Matrix | 22. DB-9 Serial Female Connector |
| 7. RTC Battery | 15. RDL Bus FRC Connector | 23. Jumper Settings for UART Selection Pin |
| 8. Buzzer | 16. Raspberry Pi Controller | 24. WiFi Module Selection Pin |



APPLICATION WIRING DIAGRAM

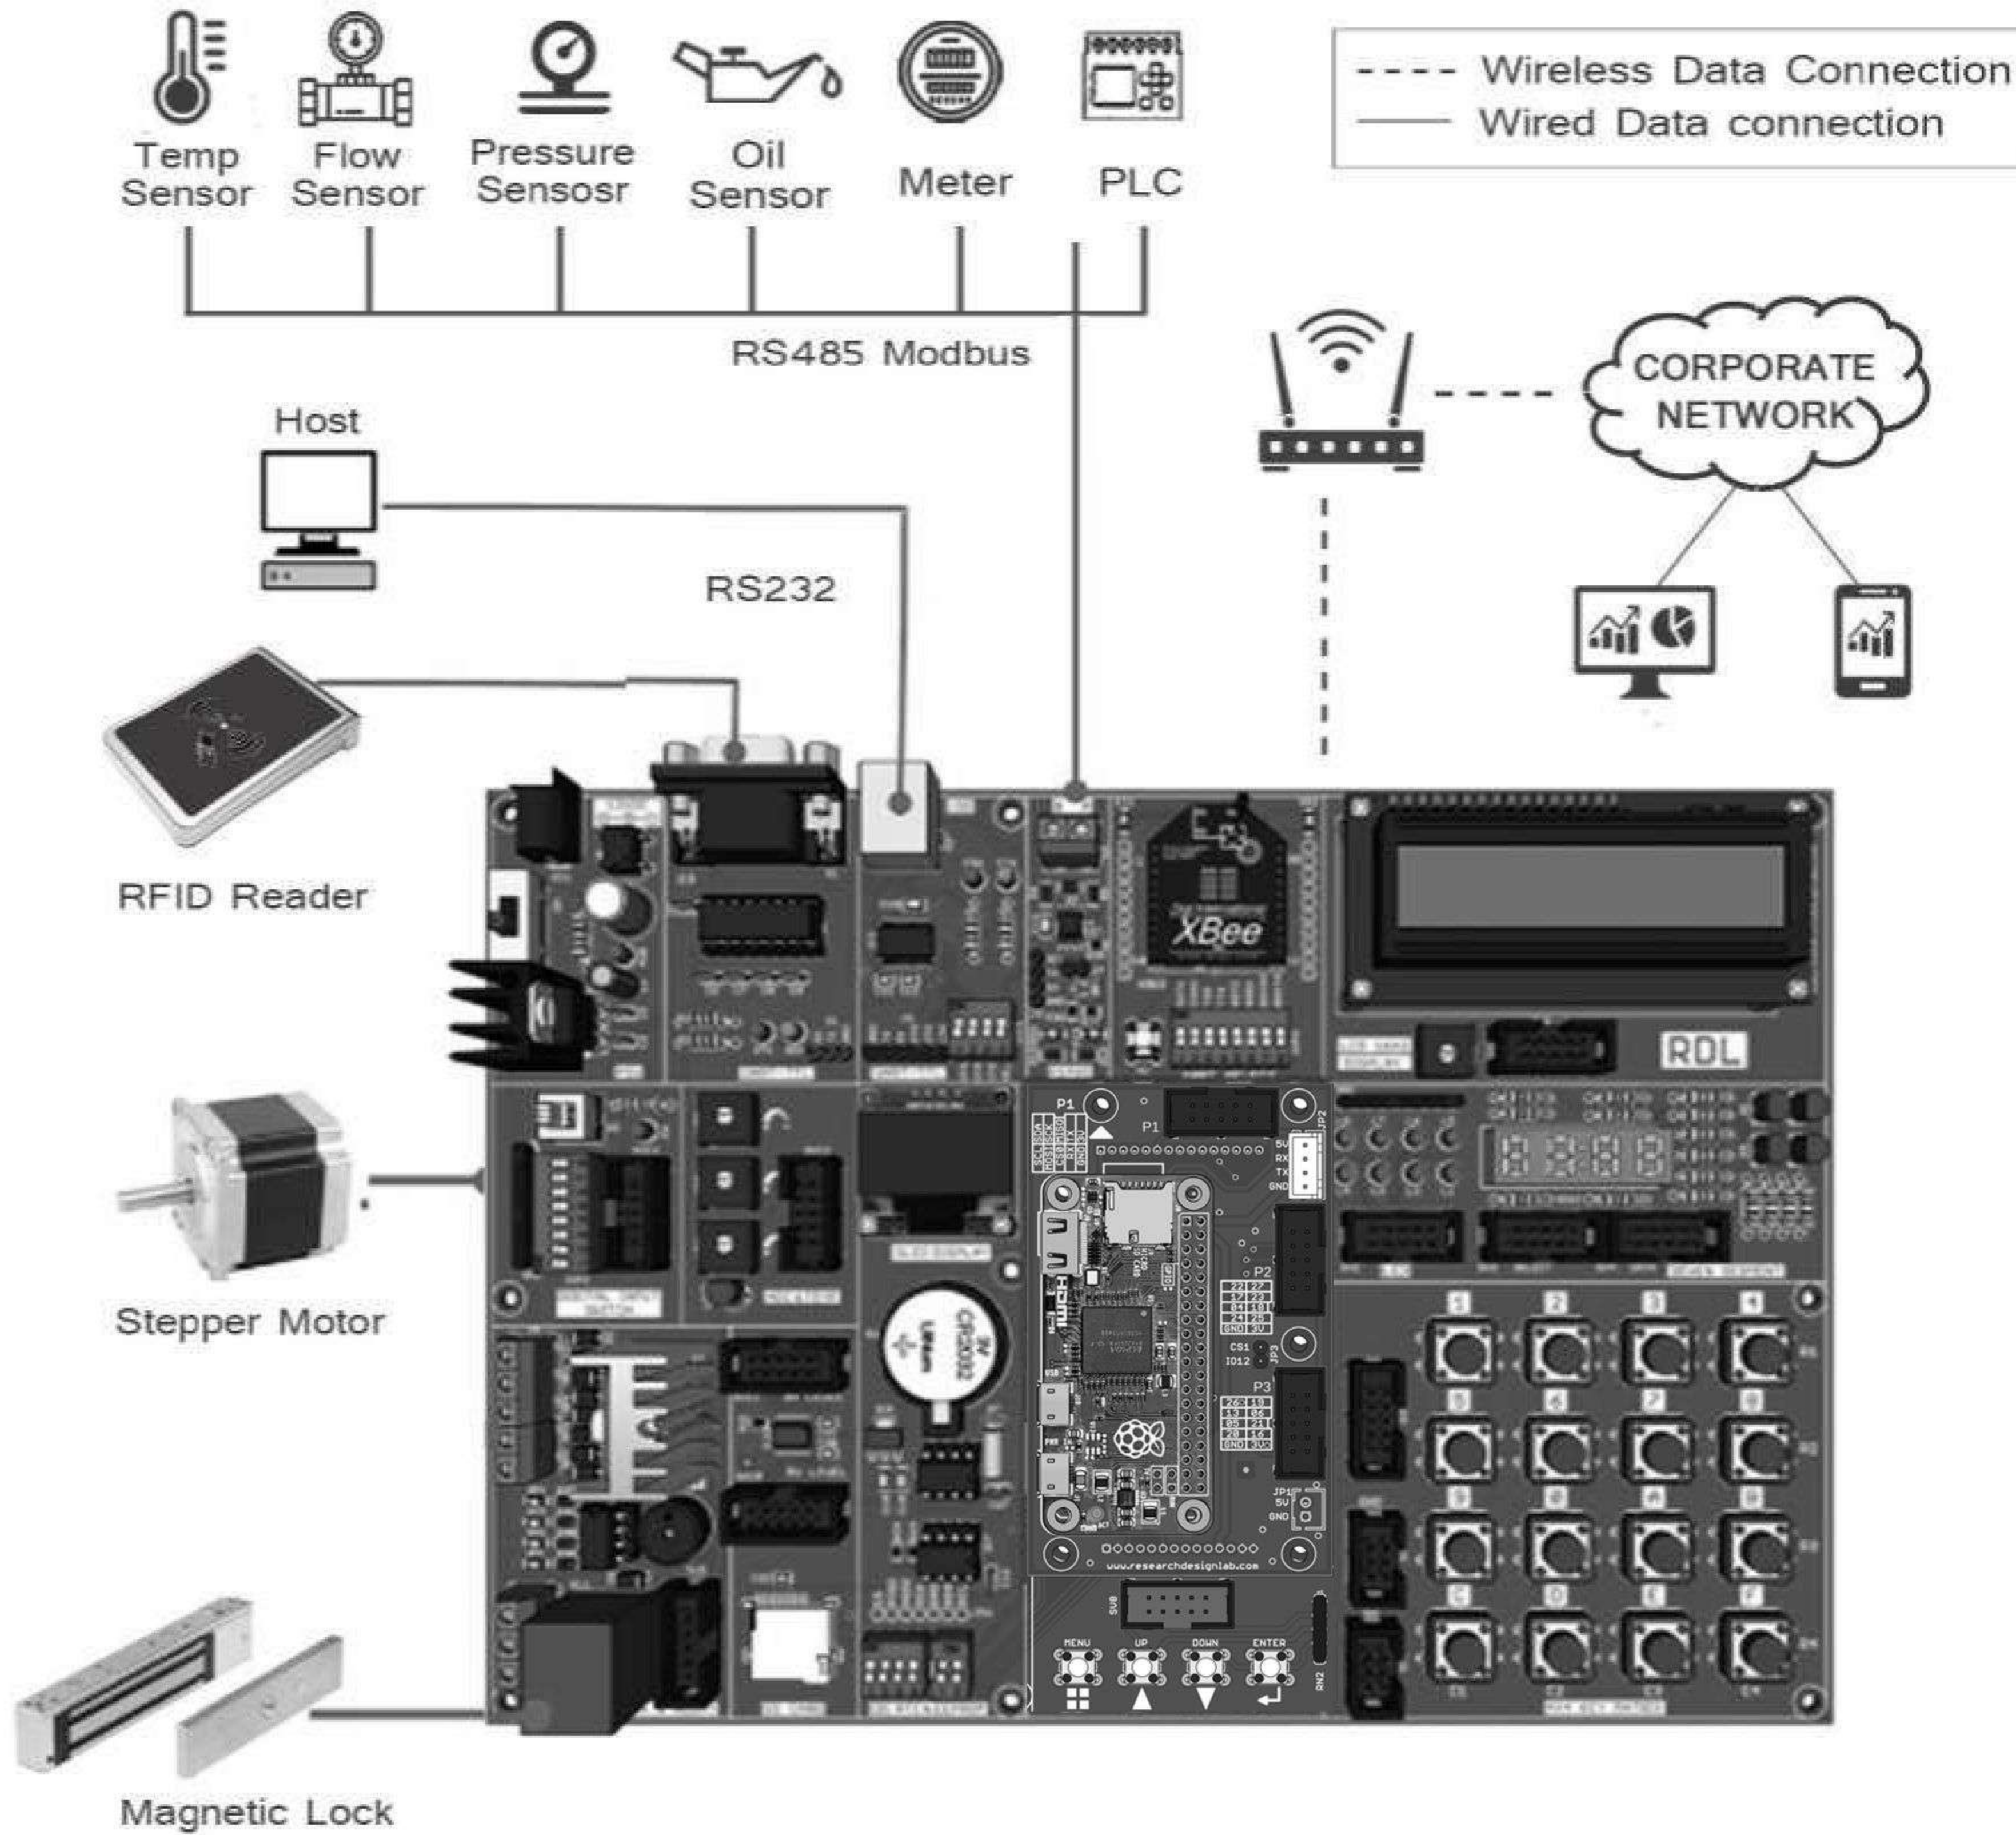

Quick Idea to Proof of Concept (POC)

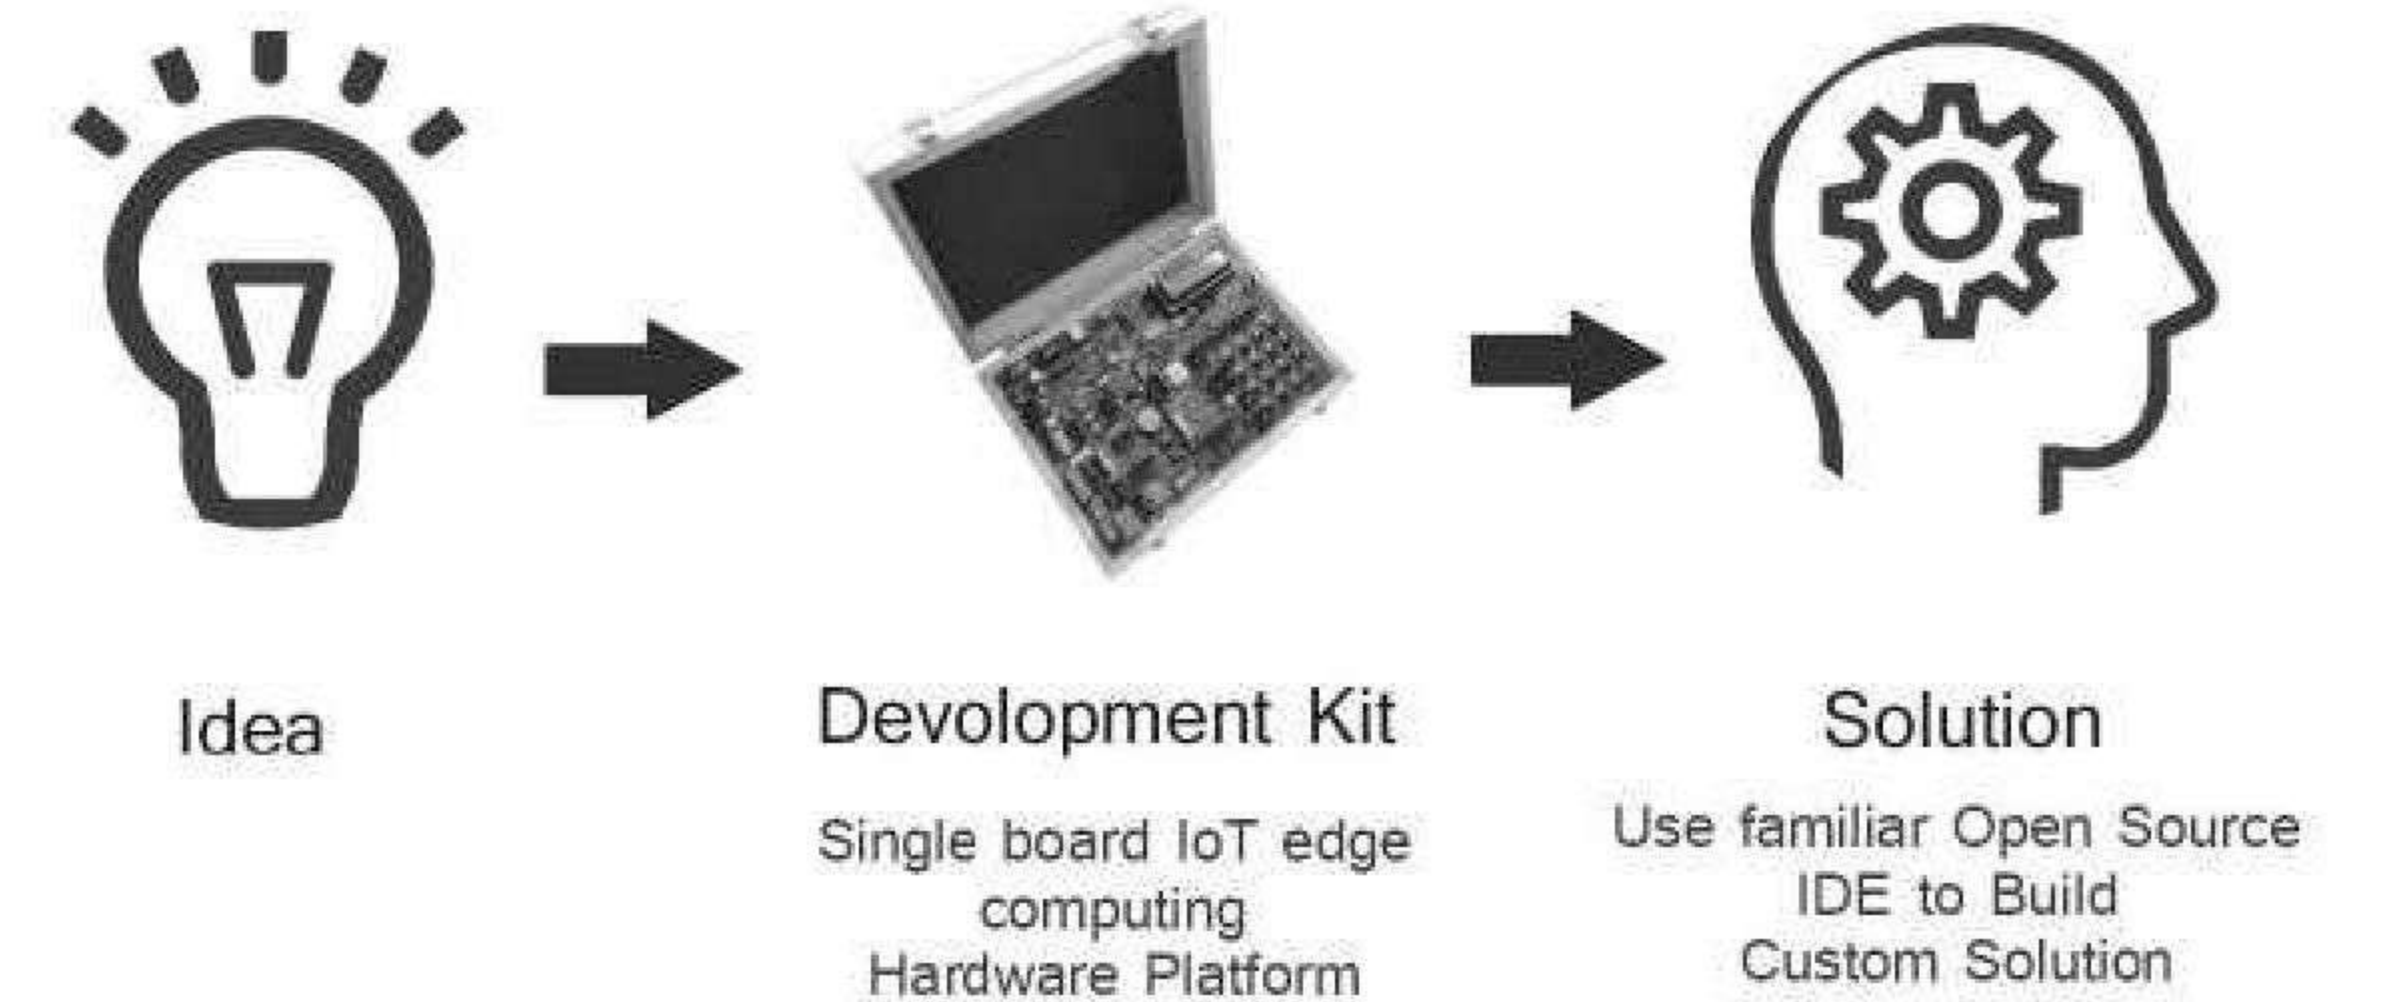


Package Includes

- ✓ Development Board with Wooden Enclosure
- ✓ USB Cable
- ✓ 12V 2A Adapter
- ✓ FRC Cable

NOTE: XBee module is not included in the package



ACCESSORIES - PROGRAMMABLE ESP32 IoT EDGE IO MODULE

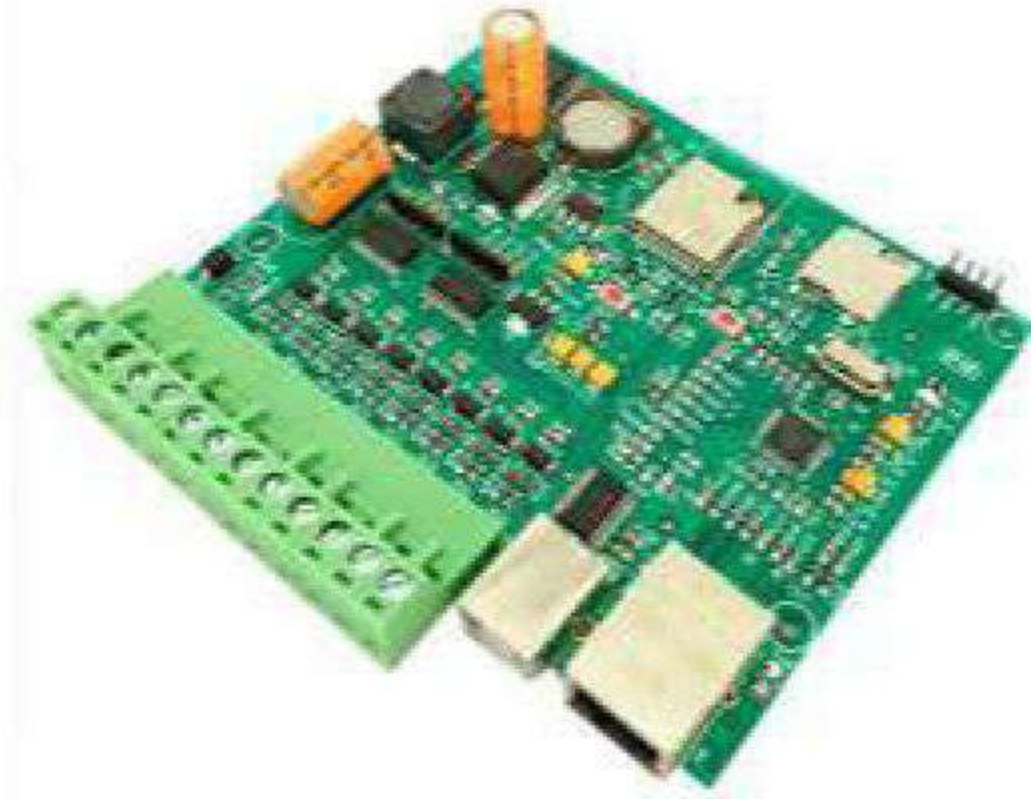


ORDER CODE: RDL869

Features:

- Controller ESP32 Bit Dual Core 32 Bit 240 MHz 16MB
- 8X Isolated Digital Input
- 1X Isolated Ethernet 10/100MBPS
- 1X USB for Programming & Configuring
- 9 to 36V Power Supply
- 16GB SD Card for Event Log
- Real Time Clock
- OnBoard Bluetooth & WiFi

Application:

- ✓ Andon System
- ✓ Hotel Room Automation
- ✓ Smart FeedBack Collecting System
- ✓ Alaram & Automated Task Application
- ✓ Digital Checksheet

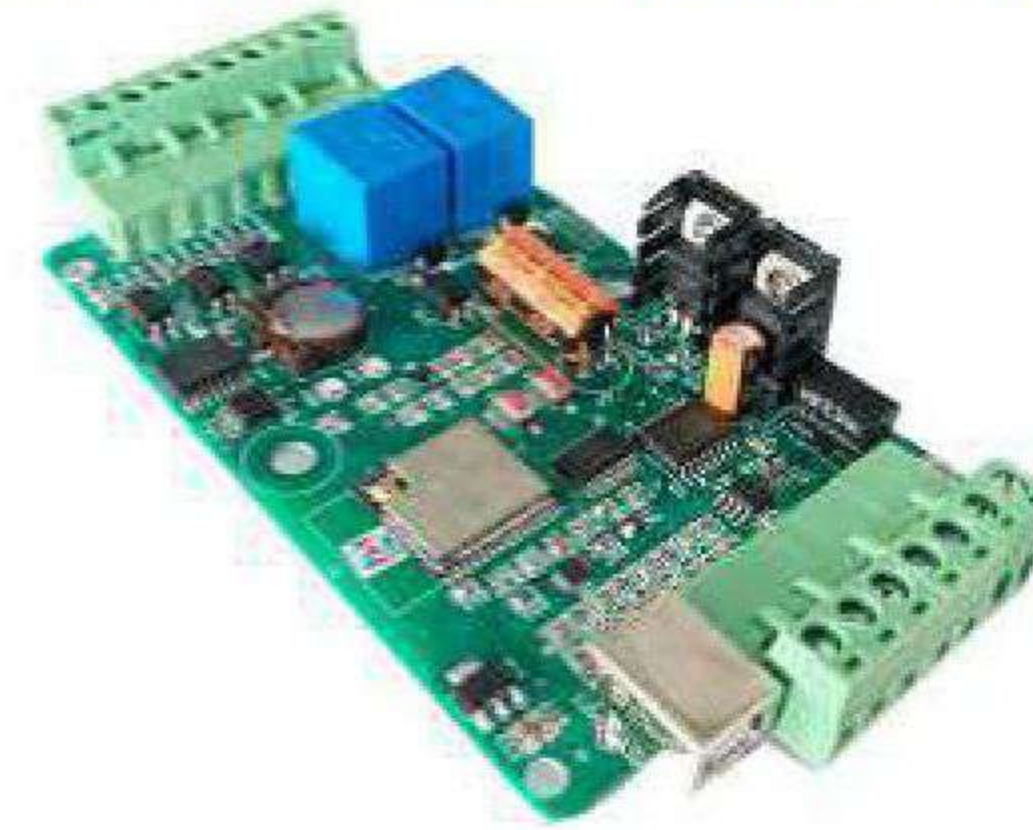

ORDER CODE: RDL865

Features:

- Controller ESP32 Bit Dual Core 32 Bit 240 MHz 16MB
- 3x Isolated Digital Input 24V
- 2X Isolated Relay 6A
- 4X Isolated Analog Input 0-10V to 4-20mA
- 1X Isolated RX45 Modbus RTU
- 1X USB for Programming Configuration
- RTC for Realtime Clock
- OnBoard Bluetooth & WiFi
- Supply Voltage 12-36V

Application:

- ✓ Production & Process Monitoring System
- ✓ Remote Monitoring System
- ✓ Condition Monitoring System
- ✓ Utility Monitoring System
- ✓ Greenhouse Monitoring System



ORDER CODE: RDL857

Features:

- Controller ESP32 Bit Dual Core 32 Bit 240 MHz 16MB
- 4X Isolated Digital Input 24V
- 4X Isolated 6AmpsRelay
- 1X Isolated RS485 Modbus RTU
- 1X USB Programming & Configuring
- On Board WiFi & Bluetooth
- Power Supply to 12-36V

Application:

- ✓ Andon System
- ✓ Hotel Room Automation
- ✓ Smart FeedBack Collecting System
- ✓ Alaram & Automated Task Application
- ✓ Digital Checksheet

Note: Additional Accesories need to be Order Separately. For More Additional Accessories Please Contact us Directly.



ACCESSORIES - PROGRAMMABLE ESP32 IoT EDGE IO MODULE



4G/LTE COMMUNICATION MODULE
ORDER CODE: RDL876

Features:

• 4G/LTE	Max 150Mbps Down link / Max 50 Mbps Uplink
• Edge	Max 256kbps Down link / Max 236.8 kbps Uplink
• 4G/LTE Chipset	Qualcomm MDM9207, ARM Cortex A7 1.3 GHz
• Protocol	TCP / IP, JSON, MQTT, SSL, FTP, RESTful
• Security	WFA,WPA/WPA2 and WAPI

Application:

✓ Renewable Monitoring System	
✓ Asset Tracking	✓ Automation
✓ Digital Signage	✓ Smart Grid & Meter
✓ Fixed Wireless Access	✓ Telehealth
	✓ Paymeny Terminal



CLOUD PLC
ORDER CODE: RDL826

Features:

• Controller ESP32 Bit Dual Core	• 1X Isolated RS485
32 Bit 240 MHz 16MB	• DS3231 RTC
• LX6 Microprocessor 32 bit, with Clock Frequency 240MHz	• 1X WiFi
• 4X Isolated Analog input 0-24V	• UART Programming
6X isolated Digital input 24V	OTA (Over The Air) Firmware
• 4X Isolated digital output/PWM	• upgrade for WiFi devices
• Working Voltage 24V	• 16 GB inbuilt storage
• 2X Relay (NO & C)	• LED indicators to indicate Power

Application:

✓ Production and process monitoring.	✓ Leakage detection.
✓ Utilities monitoring.	✓ Cold storage monitoring.
✓ Condition monitoring.	✓ District metering.
✓ Environment monitoring.	✓ Water treatment.
✓ Industrial Smart grid	✓ Generator monitoring.
	✓ Green House.



WiFi RELAY 30A
ORDER CODE: RDL877

Features:

• Controller ESP32 Bit Dual Core
32 Bit 240 MHz 16MB
• 1X RTC
• 1X Current Sensor
• 1X 30 Amps Relay
• On Board WiFi & Bluetooth
• On Board Power Supply
100-270VAC 50/60Hz

Application:

✓ Home Automation
✓ Alarms
✓ Relay Timer Enabled
✓ Open Wall control
✓ Vending machine

Note: Additional Accesories need to be Order Separately. For More Additional Accessories Please Contact us Directly.



ACCESSORIES - DIY IoT DEVELOPMENT KIT




DIY AUTOMATED PLANT MONITORING SYSTEM

ORDER CODE: RDL878

Package Includes

- ESP32 IoT Trainer Kit with Wooden Enclosure
- USB Cable
- 12V 2A Adapter
- FRC Cable
- 1X IoT Module RDL 865
- 2X Soil Moisture Sensor
- 2X Valve
- 3X 1Meter Drip Irrigation Pipe
- Coupling Accessories 1 Set

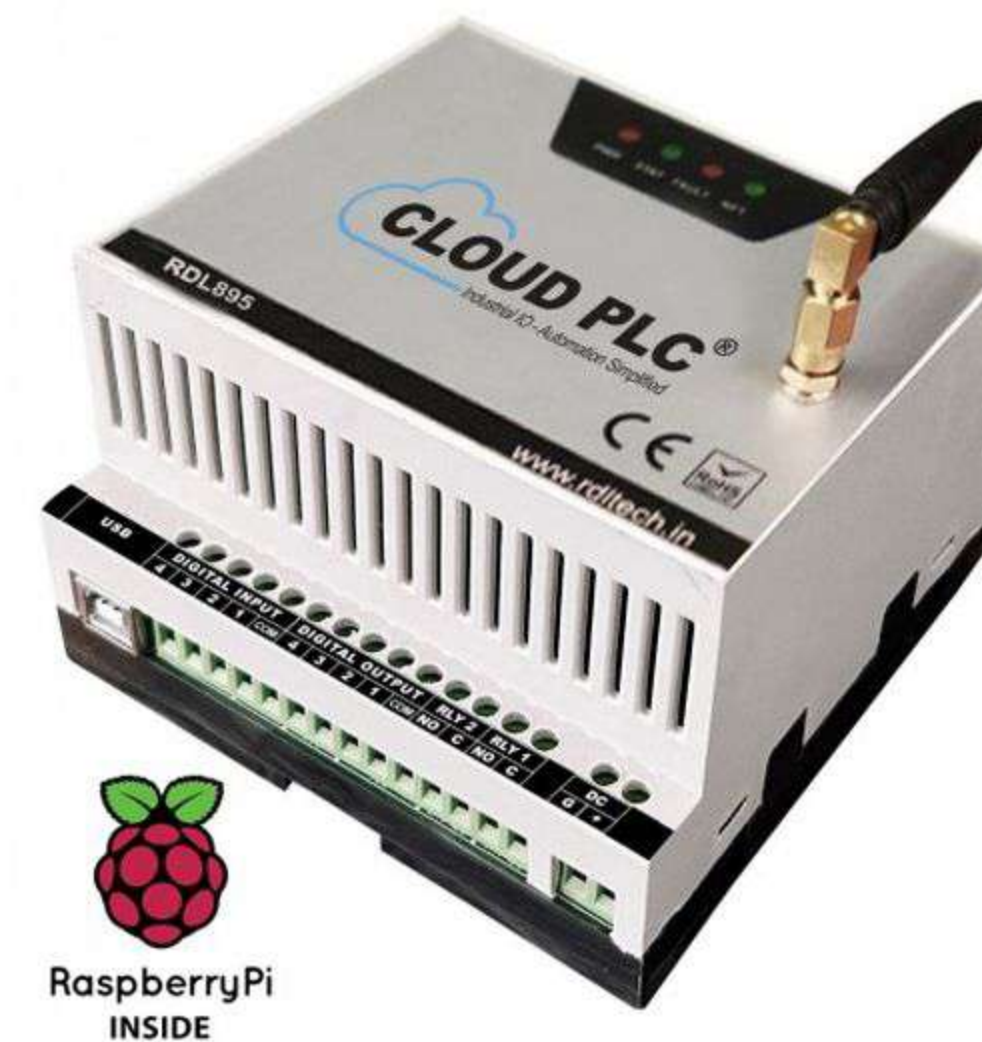

CLOUD PLC RPI - 0

ORDER CODE: RDL895

Package Includes

- Cloud PLC with Raspberry Pi 0
- USB Cable



DIY ANDON

ORDER CODE: RDL880

Package Includes

- ESP32 IoT Trainer Kit with Wooden Enclosure
- USB Cable
- 12V 2A Adapter
- FRC Cable
- IoT Edge IoT Module RDL857
- 1X Event Input Box
- 1X Tower Light
- Connecting Accessories

Note: Additional Accessories need to be Order Separately. For More Additional Accessories Please Contact us Directly.



We Ship Worldwide

Our Shipping Partner



We Accept



Note:

1. Unless otherwise specified, all parameters in this datasheet were measured at 25°C and 75% humidity.
2. All index testing procedures in this datasheet are based on our company's corporate standards.
3. We offer product customization, OEM and ODM Services; please contact the sales team @ sales@rdltech.in.
4. We Ship Worldwide.
5. Specifications are subject to change without prior notice.
6. For additional information on Product and to buy online @ www.researchdesignlab.com

RDL Technologies Pvt. Ltd.

🏠 5th Floor, Sahyadri Campus, Adyar, Mangaluru - 575007 | 📞 +91 8088423347 | 📠 +91 824 2988407

✉ sales@rdltech.in | 🌐 www.rdltech.in | 📺 www.youtube.com/@researchdesignlab956